

CT36R

Multifunction | 24 ... 48 V AC / DC | 110 ... 240 V AC / DC



Time data		
Timing functions	fig.1 I, P	
Timing range	50 ms ... 600 ms / 0.5 ms ... 6 s / 5 s ... 60 s / 0.5 min ... 6 min / 5 min ... 60 min / 0.5 ... 6 h / 5 h ... 60 h	
Timing scale	50 ms ... 60 h	

Control circuit		
Nominal voltage	24 ... 48 V AC/DC	110 ... 240 V AC/DC
Operating voltage range	19 ... 60 V AC/DC	82 ... 265 V AC/DC
Power consumption AC / DC	0.3 VA / 0.3 W	1 VA / 1 W
Current consumption on supply A1-A2 AC / DC	12 mA / 12 mA	8 mA / 8 mA
Frequency range	0; 40 ... 60 Hz	0; 40 ... 60 Hz

General data		
Storage temperature (no ice)	-40 ... 85 °C	
Operation temperature	-40 ... 70 °C	
Dimensions	fig. 2	
Weight	25 g	
Ingress Protection	IP 20	
Housing material	PC	

Product references			
Description	Type	24-48	110-240
AC / DC supply	CT36R/UC...V	✓	✓

Other voltages on request. Please contact support@comatreleco.com.
«...» List control voltage to complete product references.


Accessories	
Socket	S3-M0R, FS-C/5 (BEUTEL/UNIT 5 STK/PCS)



fig. 1. Wiring diagram



fig. 2. Dimensions (mm)

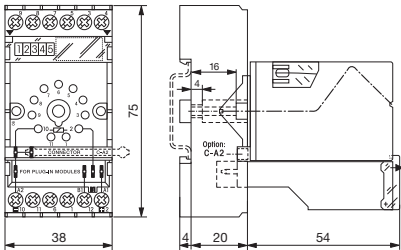

Technical approvals, conformities

Standards EN 45545-2; EN 50155

Approvals