

CRC02

Overvoltage protection

Power supply	
Nominal voltage	24 V UC
Operating voltage range	0 ... 30 V DC / 0 ... 38 V AC
Frequency range	47 ... 63 Hz

General data	
Storage temperature (no ice)	-40 ... 85 °C
Operation temperature	-25 ... 60 °C
Conductor cross section control / main circuit	2.5 mm ² , 2 x 1.5 mm ²
Nominal screw torque control / main circuit	0.4 Nm
Dimensions	fig. 2
Weight	70 g
Ingress Protection	IP20
Housing material	PC

Product references		
Description	Type	24
Overvoltage protection	CRC02/UC...V	✓

Other voltages on request. Please contact support@comatreleco.com.
«...» List control circuit voltage to complete product references.



fig. 1. Wiring diagram





fig. 2. Dimensions (mm)

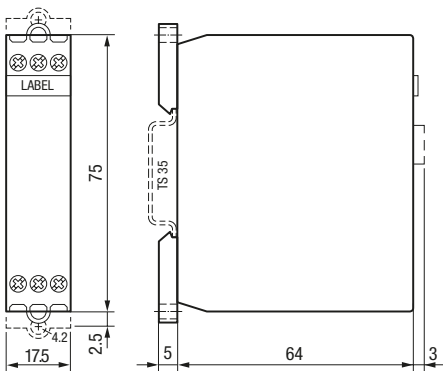

Technical approvals, conformities

Standards EN 60730-1; EN 61000-6-2; EN 61000-6-3

Approvals  