


## Zugentlaster mit Madenschraube

Art. 5100/7/08/26 = schwarz

Art. 5100/7/08/16 = weiss

Art. 5100/7/08/46 = gold

Art. 5100/7/08/11 = transparent

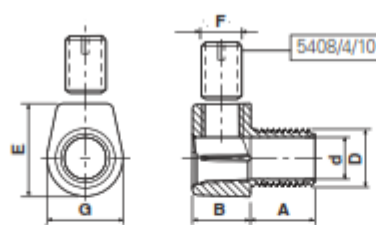

Materiale / Material

- 5 Nylon 66
- 6 Nylon 66 RV
- 11 Polycarbonato

Approvati per l'utilizzo in Classe II  
Approved for Classe II fittings

| Codice / Code | Dimensioni / Dimensions (mm) |    |        |     |    |       |      | Colore / Colour    |                  |                |              | Omologato / Certified |
|---------------|------------------------------|----|--------|-----|----|-------|------|--------------------|------------------|----------------|--------------|-----------------------|
|               | A                            | B  | D      | d   | E  | F     | G    | 0 Neutro / Natural | 1 Bianco / White | 2 Nero / Black | 4 Oro / Gold |                       |
| 5100/7/05     | 5                            | 10 | M 10x1 | 7,2 | 16 | M 7x1 | 13,2 | 11                 | 6                | 6              | 6            | C.S. N°EH 229         |
| 5100/7/08     | 8                            | 10 | M 10x1 | 7,2 | 16 | M 7x1 | 13,2 | 11                 | 6                | 6              | 6            | C.S. N°EH 229         |
| 5100/7/11     | 11                           | 10 | M 10x1 | 7,2 | 16 | M 7x1 | 13,2 | 11                 | 6                | 6              | 6            | C.S. N°EH 229         |

I bloccacavi vengono forniti con grano filettato separato.

M 10x1: Coppia di serraggio max = 130 N cm

Per cavi: H03VV-F/H05VV-F Ø min 4,8 - Ø max 6,5 e H03VVH2-F sez. min 3x4,8 - sez. max 3,6x6,4

Cable clamps are supplied with separate threaded grub.

M 10x1: Max tightening torque = 130 N cm

For cables: H03VV-F/H05VV-F Ø min 4,8 - Ø max 6,5 and H03VVH2-F sect. min 3x4,8 - sect. max 3,6x6,4