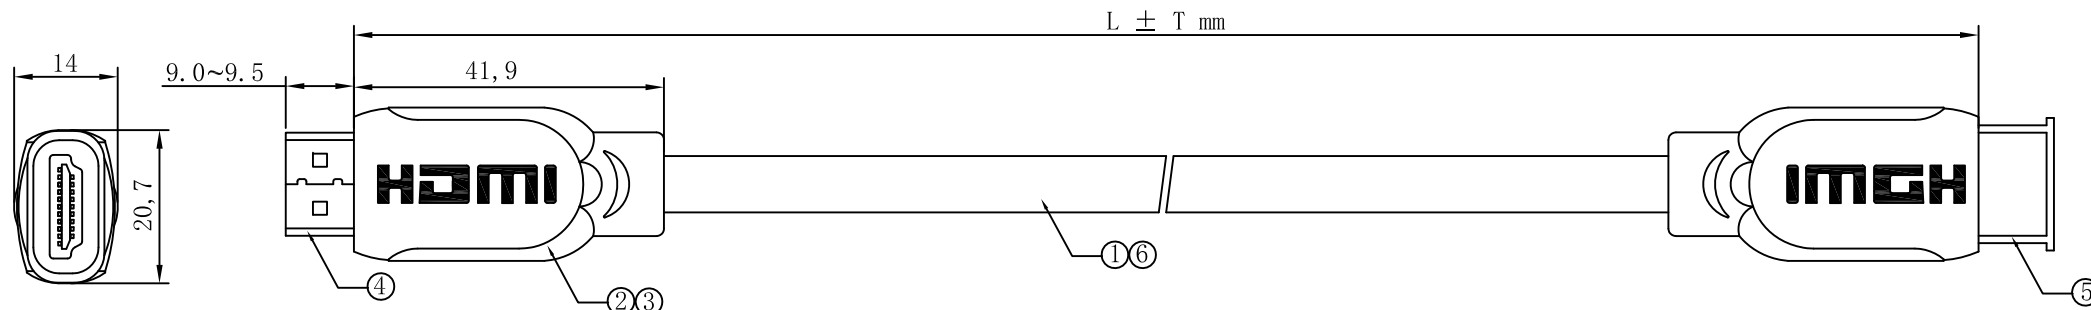




REV.	DESCRIPTION	DATE
A		2022-01-21
B		



Test standard:

- 1、100% pass open circuit, short circuit, dislocation test.
- 2、On-resistance: 5Ω Max
- 3、Insulation resistance: $5M\Omega$ Min/DC200V/10ms
- 4、100% pass 8k TV test

PART NO.	CABLE LENGTH
11. 04. 6010	1000±30mm
11. 04. 6011	2000±30mm

Cable Specifications:	Pin Assignment
 jacket:Black PVC OD $\phi 6.3 \pm 0.2 \text{mm}$ braid: 8/16/0.12AM PE wire:30AWG shielding:AL shielding:AL+HMY FPE wire:30AWG drain wire:30AWG	P1 PIN 1 PIN 3 PIN 2 PIN 4 PIN 6 PIN 5 PIN 7 PIN 9 PIN 8 PIN 10 PIN 12 PIN 11 P2 PIN 1 PIN 3 PIN 2 PIN 4 PIN 6 PIN 5 PIN 7 PIN 9 PIN 8 PIN 10 PIN 12 PIN 11 P1 PIN 14 PIN 19 PIN 17 PIN 13 PIN 15 PIN 16 PIN 18 SHELL P2 PIN 14 PIN 19 PIN 17 PIN 13 PIN 15 PIN 16 PIN 18 SHELL 

BOM LIST		ITEM NUMBER	11.04.6010 / 11.04.6011			DRAWER	Ming
NO.	SPECIFICATIONS		TITLE	ROLINE ATC Cer. Ultra High Speed HDMI Cable, AM/AM			CHECKED
1	UL 20276 30AWG OD:6.3 (30#Cu*1P+30#TC+HMY)*5+30#Cu*4C+D30#TC+128AM-D+PVC	MATERIAL					
2	Gun black Zinc Alloy shell		REV.	A	UNIT	MM	
3	Inner Molding:Transparent PE and Tinplate	DRAWING NO:					
4	HDMI 19 Pin Gold-plated copper shell						
5	Dust cap						
6	Printing:Ultra High Speed HDMI™ Cable						