


CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A0	INITIAL RELEASE	2022.04.19	
A1	ADD "HDMI" LOGO ON THE PLUGS UPDATE CABLE LABEL	2023.02.20	

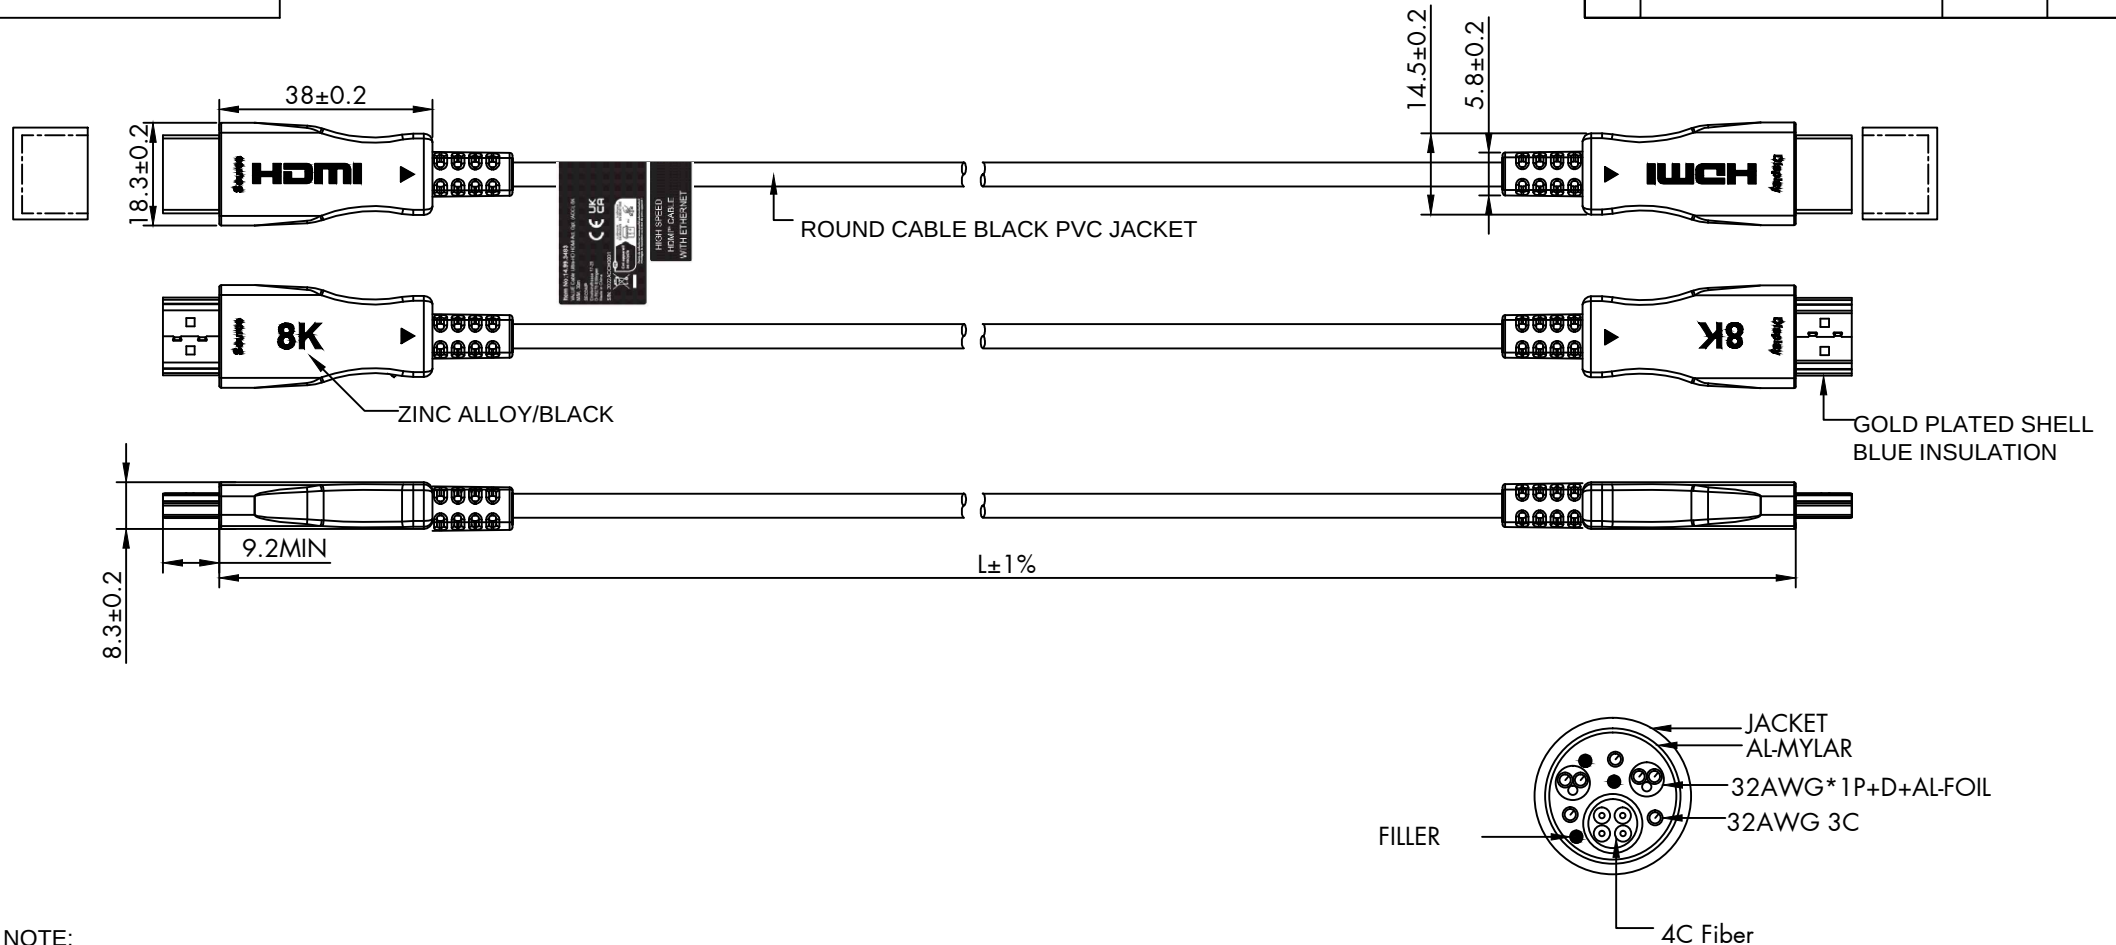

- NOTE:
- 1.Support 48G 4K@120HZ 4:4:4 or 8K@60HZ DSC
 - 2.Plug and play
 - 3.Support HDCP1.4/2.2, ARC,HDR10, 3D,HEC
 - 4.ARC can achieve up to 100M
 - 5.Self-detecting function for EDID information
 - 6.No loss of signal
 - 7.Hybrid optical cable with fiber and copper wire
 - 8.Pin gold plated,shll gold plated
 - 9.Environmental specifications:for indoor use only
 - 10.Operating temperature:-40 to 70 °C,Storage Temerature -20~40 °C
 11. Minimum bending radius 20mm
 12. Max. tension force:100N
 13. Powered via HDMI devices
 - 14.{4Core OM3 multimode fiber(high speed data)+ 7core copper cable[(32AWG TC*1P+D+AL)+32AWG TC*1P+D+AL)+32AWG TC*1C+32AWG TC*1C+32AWG TC*1C]+F+AL+Jacket},Jacket:PVC/Black,OD:5.2±0.2mm
 15. ZINC Alloy Housing , black color .

ITEM NO	LENGTH	PACKING
14.99.3484	15m±150mm	1pc+opp bag/brown box+label
14.99.3485	20m±200mm	1pc+opp bag/brown box+label
14.99.3483	30m±300mm	1pc+spool/brown box+label
14.99.3487	50m±500mm	1pc+spool/brown box+label
NAME VALUE Ultra-HD HDMI Active Optical Cable, 8K,m/m		
MAPE 		TOLERANCE X. ±1.00 X.X ±0.50
		DRAW BY SCALE MM
		PAGE 1/1