


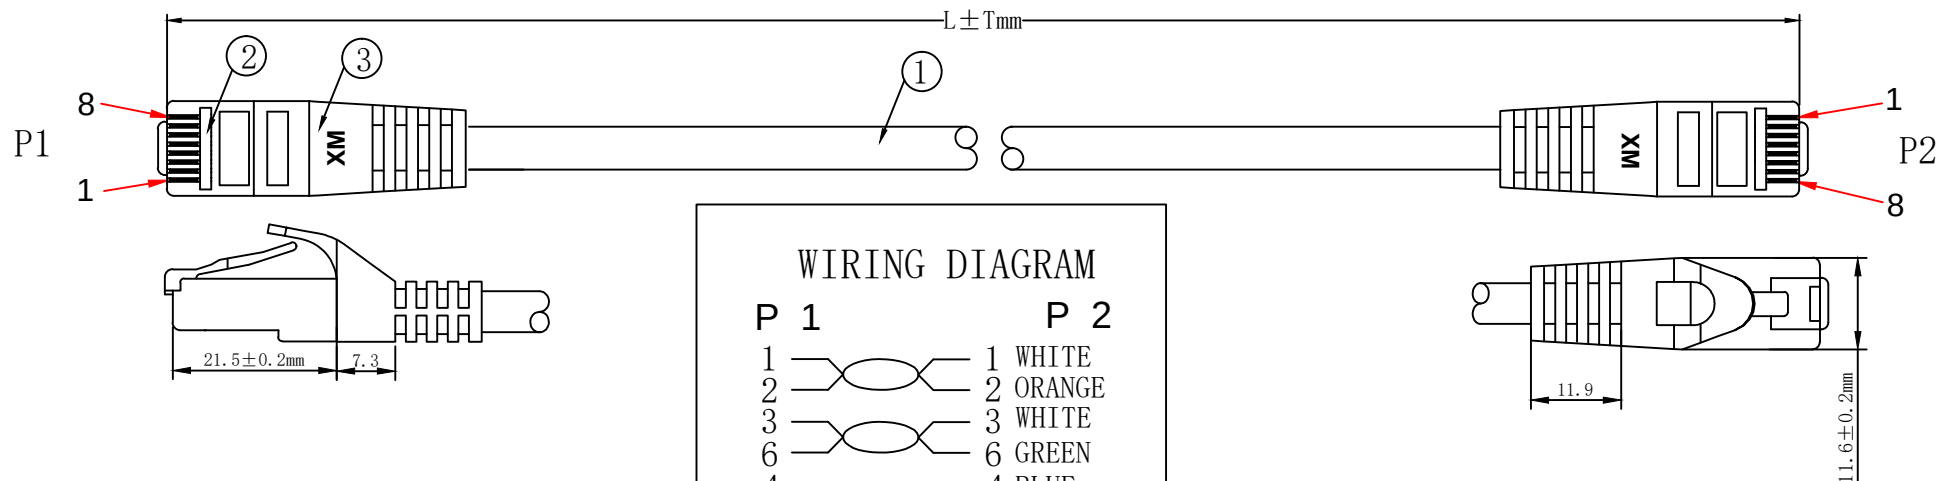

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:GHMT® roline CAT.6A S/FTP COMPONENT PATCH CORD LSZH 500MHz ISO/IEC

11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius:60mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC White	2PCS	
②	CONNECTOR	RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent Blue	2PCS	
①	CABLE	S/FTP CAT. 6A 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:White		
ITEM NO.	LENGTH (L)	TOLERANCE (T)
21. 15. 2976	300mm	± 10mm
21. 15. 2860	500mm	± 15mm
21. 15. 2861	1000mm	± 30mm
21. 15. 2864	1500mm	± 45mm
21. 15. 2862	2000mm	± 60mm
21. 15. 2863	3000mm	± 90mm
21. 15. 2865	5000mm	± 150mm
21. 15. 2866	7500mm	± 210mm
21. 15. 2867	10000mm	± 300mm
21. 15. 2868	15000mm	± 450mm
21. 15. 2869	20000mm	± 600mm

ITEM NO.	21. 15. 2976	21. 15. 2860	21. 15. 2861	21. 15. 2862	21. 15. 2863
21. 15. 2864	21. 15. 2865	21. 15. 2866	21. 15. 2867	21. 15. 2868	21. 15. 2869
DESC.	ROLINE S/FTP PatchCord CAT. 6A, LSOH, Comp. Level, White				

SECOMP

		NEW	2016-09-13	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.