


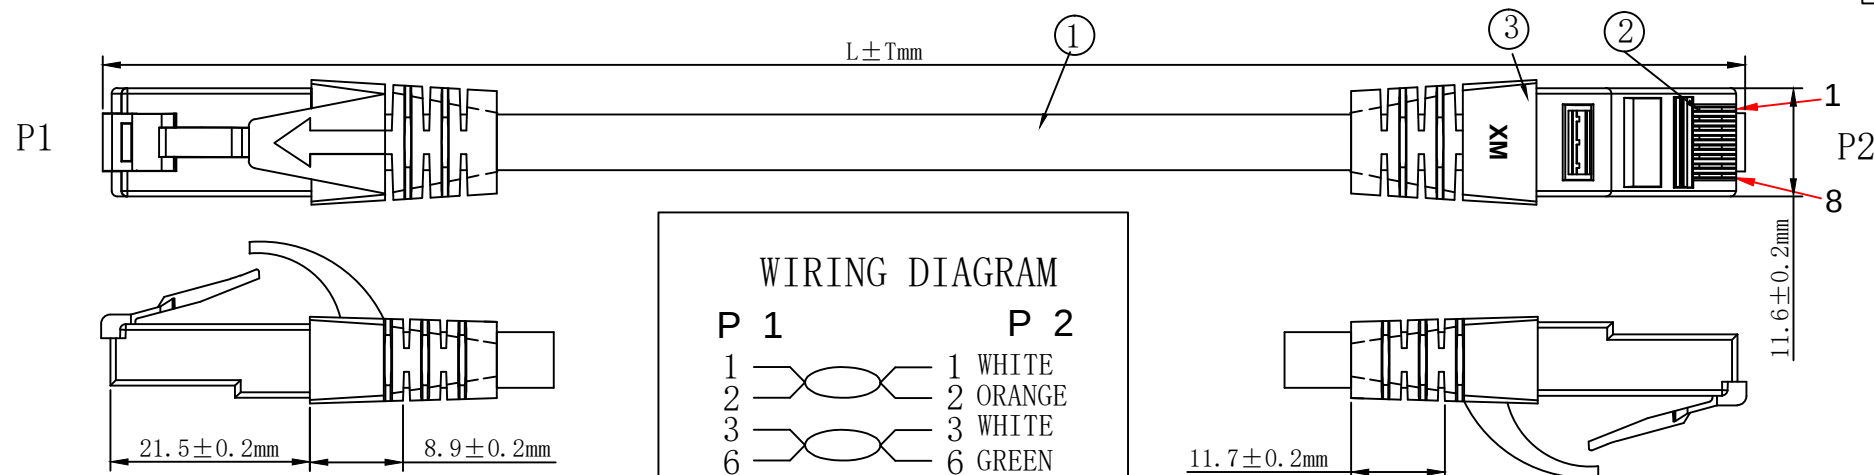

1. ELECTRICAL TEST:

- (1).100% OPEN SHORT & MISS WIRE TEST;
 (2).INSULATION RESISTANCE:DC 250V 20M OHM MIN;
 (3).CONTACTOR RESISTANCE:30 OHM MAX

2.PRINTING:GHMT® roline CAT.6A U/UTP COMPONENT PATCH CORD LSZH 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3.100% Component Patch cord Test PASS

4.Minimum bending radius:60mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Grey	2PCS	
②	CONNECTOR	RJ45 8P8C'S UNSHIELDED PIN GOLD PLATED 3u", Transparent Blue	2PCS	
①	CABLE	S/FTP CAT.6A 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

ARVIN	ALVAN	CHANGE COLOR GREY	2016-11-28	A1
		NEW	2016-09-13	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

COLOUR:GRAY(RAL 7035)		
ITEM NO.	LENGTH(L)	TOLERANCE(T)
21. 15. 2981	300mm	± 10mm
21. 15. 2700	500mm	± 15mm
21. 15. 2701	1000mm	± 30mm
21. 15. 2704	1500mm	± 45mm
21. 15. 2702	2000mm	± 60mm
21. 15. 2703	3000mm	± 90mm
21. 15. 2705	5000mm	± 150mm
21. 15. 2706	7500mm	± 210mm
21. 15. 2707	10000mm	± 300mm
21. 15. 2708	15000mm	± 450mm
21. 15. 2709	20000mm	± 600mm

ITEM NO.	21. 15. 2981	21. 15. 2700	21. 15. 2701	21. 15. 2702	21. 15. 2703
21. 15. 2704	21. 15. 2705	21. 15. 2706	21. 15. 2707	21. 15. 2708	21. 15. 2709
DESC.	ROLINE U/UTP PatchCord CAT. 6A, LSOH, Comp. Level, grey				

SECOMP