
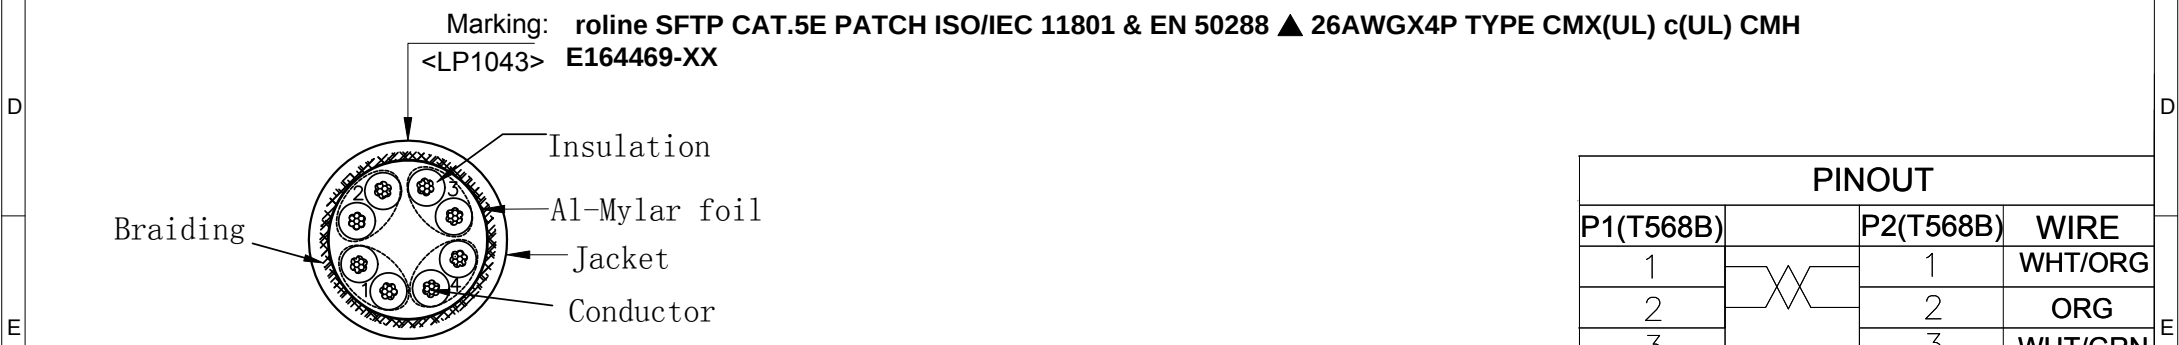


1	2	3	4	5	6	7	8	9	10
CUSTOMER NAME						DATE	REV	DESCRIPTION	BY
CUSTOMER Part No.						2019.08.09	A/0	NEW	LJW

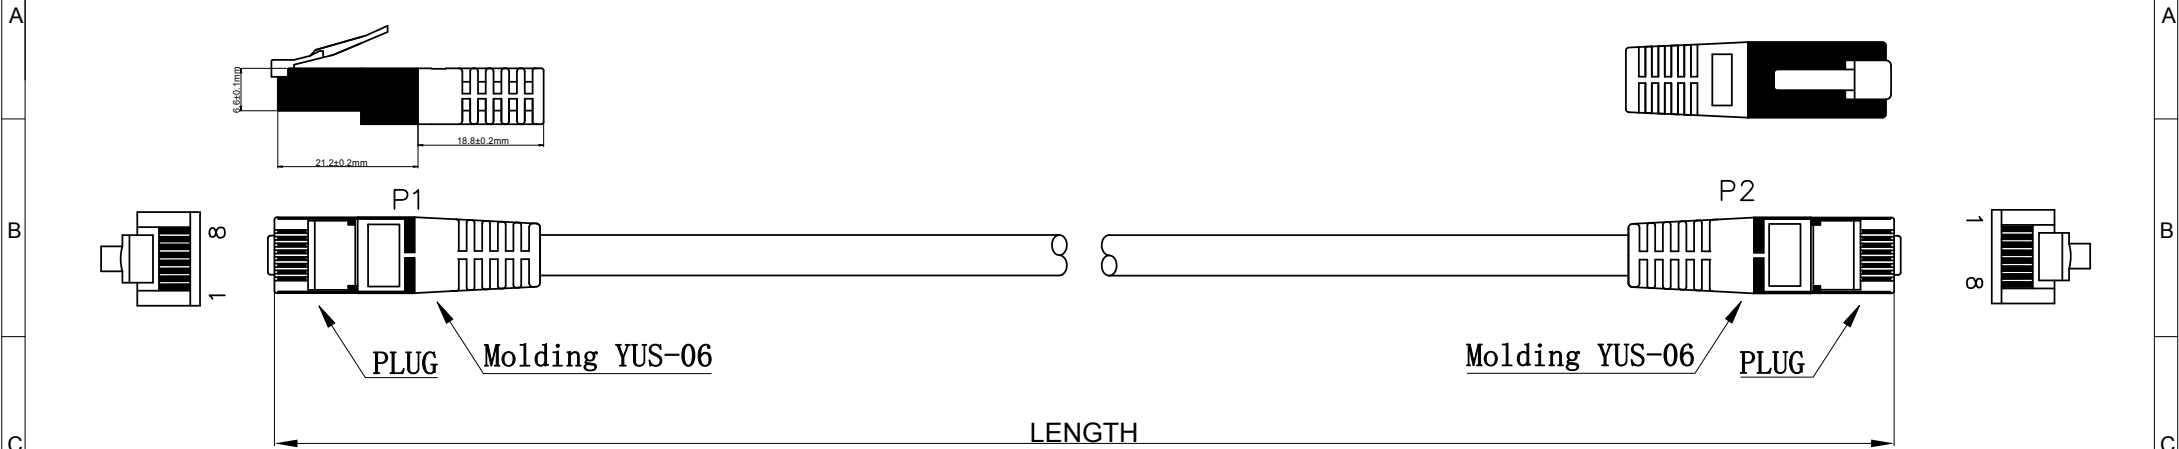

Minimum Bending Radius:≥47mm

Conductor	Bare Copper 26AWG
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.85±0.06mm
Jacket	PVC Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:5.6±0.2mm
Wire	CAT.5E S/FTP 26AWG *4P
Plug	YUS-06 8P8C 50u"
Length	XX
Color	YY

NOTE:
1.ELECTRICAL TEST:
<1> 100% OPEN SHORT & MISS WIRE TEST.

PINOUT			
P1(T568B)		P2(T568B)	WIRE
1	⌵	1	WHT/ORG
2	⌶	2	ORG
3	⌵	3	WHT/GRN
6	⌶	6	GRN
4	⌵	4	BLU
5	⌶	5	WHT/BLU
7	⌵	7	WHT/BRN
8	⌶	8	BRN
S	— · — · —	S	— · — · —

SECOMP			
Part No.			
Description	CAT.5E S/FTP STR 26AWG 4P PVC YUS-06		
UNIT	mm	CHECKER	DRAWER
PAGE	1/1		
Draw.No.			

副處長
2019.08.16
覃饒


CUSTOMER NAME
CUSTOMER Part No.

DATE
2016.06.16

REV
B/1

DESCRIPTION
NEW

BY
DMW

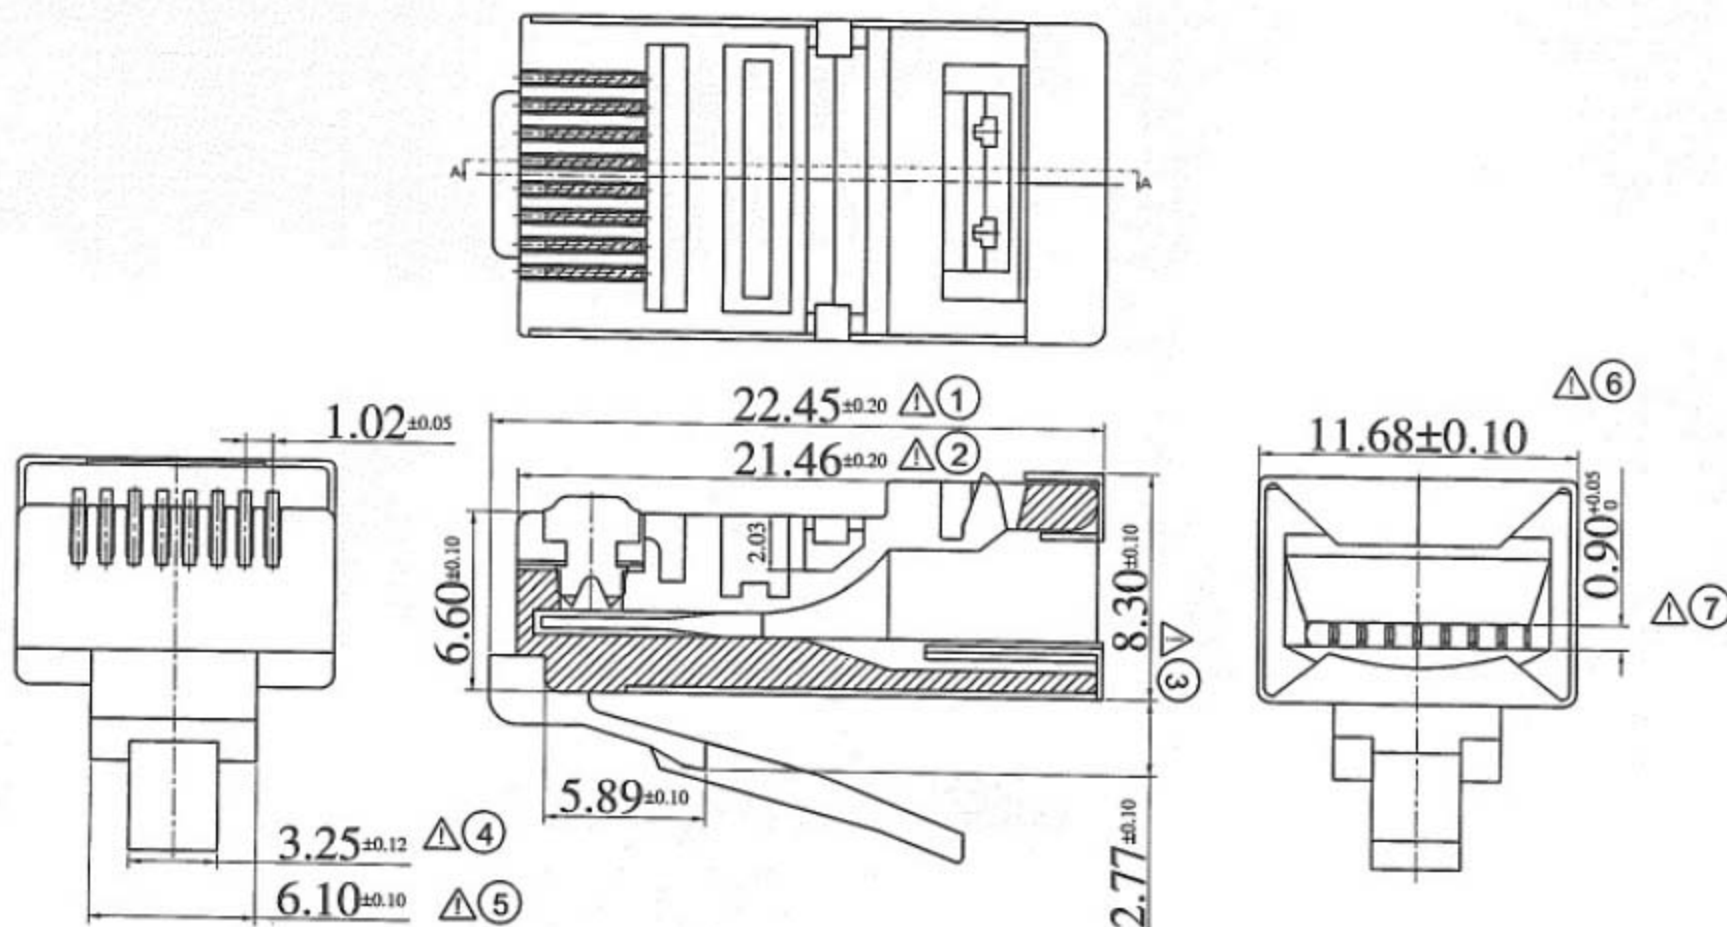

NOTE TOL:±0.1

Key Size	Tolerance	3RD	
Length (mm)	Critical	Normal	General
0-15	±0.05	±0.10	±1.0
15-60	±0.10	±0.20	±1.0
60-150	±0.15	±0.35	±1.5
150-350	±0.20	±0.50	±1.5
350-1000	±0.40	±0.65	±2.0

SECOMP

Part No.	
Description	8P8C 50u" 五類彈片屏蔽端 (孔徑:0.9mm) (保稅料)
UNIT	mm
PAGE	1/1
Draw.No.	
APPROVAL	
CHECKER	
DRAWER	DMW