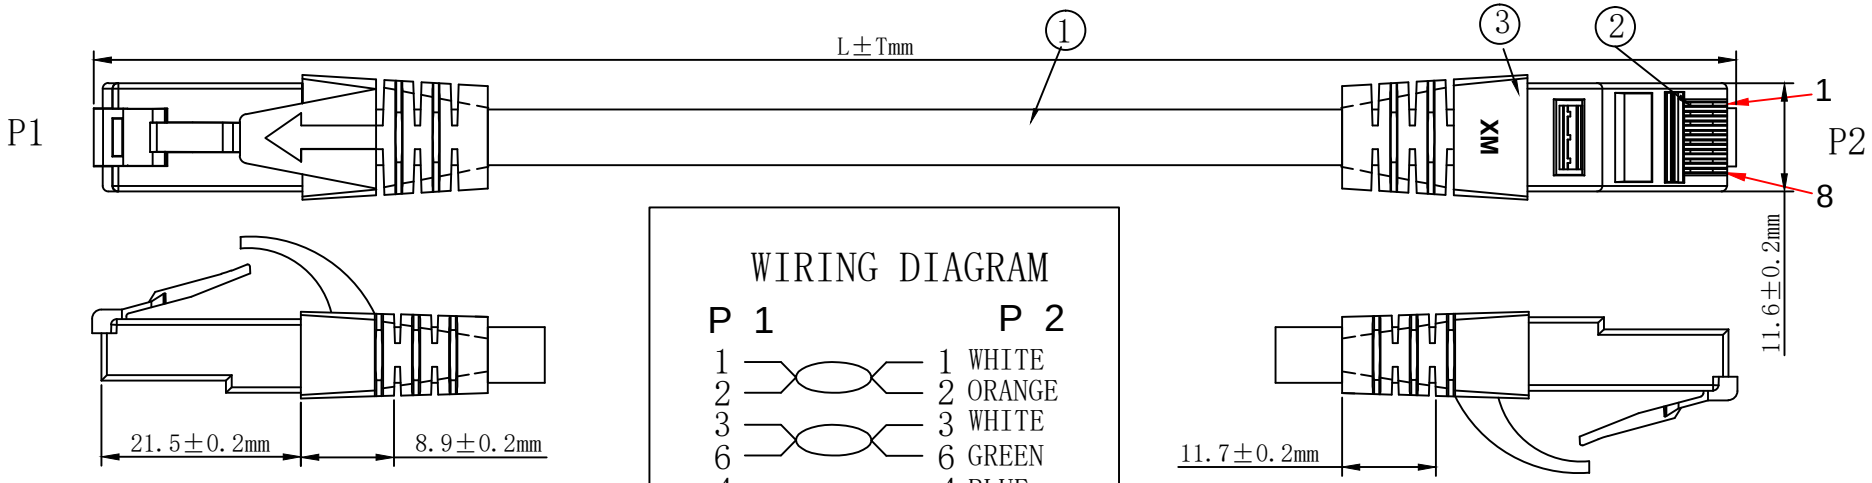

WIRING DIAGRAM

P 1	P 2
1	1 WHITE
2	2 ORANGE
3	3 WHITE
6	6 GREEN
4	4 BLUE
5	5 WHITE
7	7 WHITE
8	8 BROWN
SH	SH

1. ELECTRICAL TEST:
   (1). 100% OPEN SHORT & MISS WIRE TEST;
   (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
   (3). CONTACTOR RESISTANCE:30 OHM MAX
2. PRINTING:GHMT® roline CAT.6A U/UTP COMPONENT PATCH CORD LSZH 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2
3. 100% Component Patch cord Test PASS
4. Minimum bending radius:60mm

MATERIAL LIST

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Green	2PCS	
②	CONNECTOR	RJ45 8P8C'S UNSHIELDED PIN GOLD PLATED 3u", Transparent Blue	2PCS	
①	CABLE	S/FTP CAT.6A 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2±0.2MM	1PCS	

COLOUR:Green (PANTONE:3278C)

ITEM NO.	LENGTH(L)	TOLERANCE(T)
21.15.2984	300mm	±10mm
21.15.2730	500mm	±15mm
21.15.2731	1000mm	±30mm
21.15.2734	1500mm	±45mm
21.15.2732	2000mm	±60mm
21.15.2733	3000mm	±90mm
21.15.2735	5000mm	±150mm
21.15.2736	7500mm	±210mm
21.15.2737	10000mm	±300mm
21.15.2738	15000mm	±450mm
21.15.2739	20000mm	±600mm

ITEM NO.	21.15.2984	21.15.2730	21.15.2731	21.15.2732	21.15.2733
21.15.2734	21.15.2735	21.15.2736	21.15.2737	21.15.2738	21.15.2739
DESC.	ROLINE U/UTP PatchCord CAT.6A,LSOH,Comp.Level,Green				

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2016-09-13	A

SECOMP