


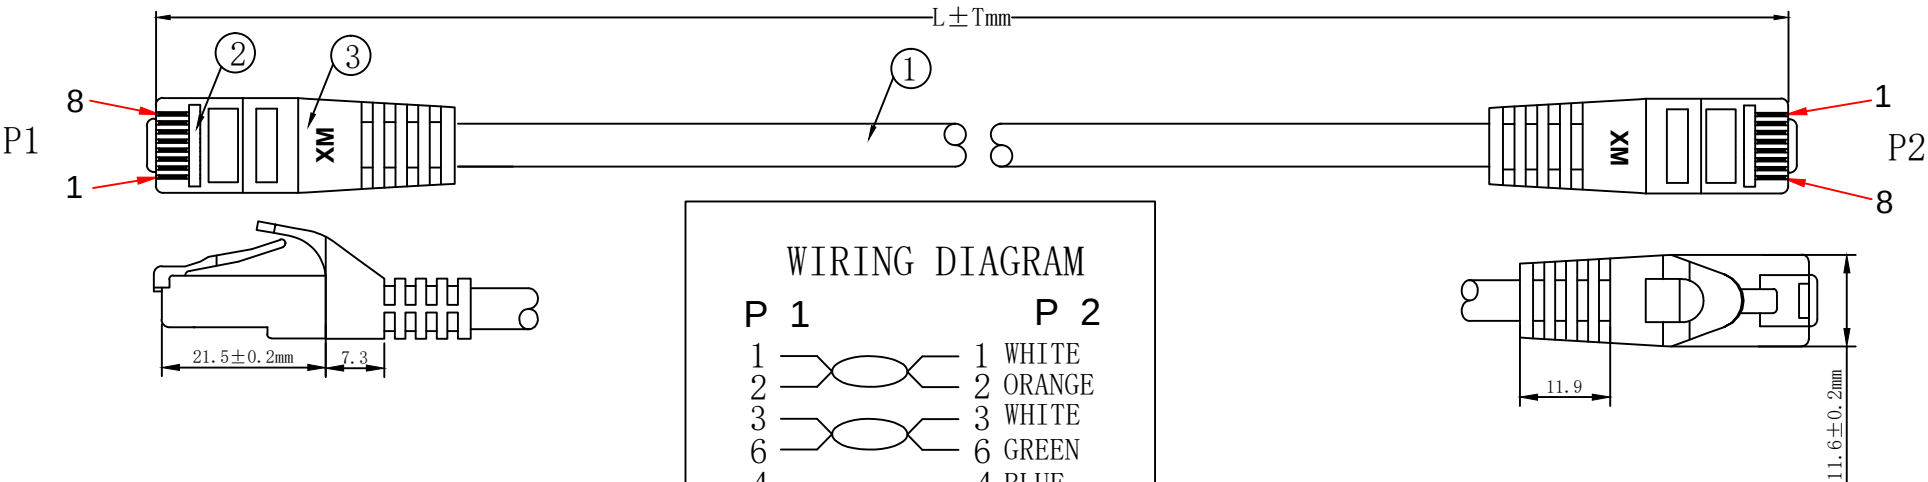

1. ELECTRICAL TEST:

- (1).100% OPEN SHORT & MISS WIRE TEST;
- (2).INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3).CONTACTOR RESISTANCE:30 OHM MAX

2.PRINTING:GHMT® roline CAT.6A S/FTP COMPONENT PATCH CORD LSZH 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3.100% Component Patch cord Test PASS

4.Minimum bending radius:60mm

MATERIAL LIST

|     |                  |                                                                                 |       |        |
|-----|------------------|---------------------------------------------------------------------------------|-------|--------|
| ⑥   | LABEL            | NO DRY GLUE LABEL                                                               | 1PCS  |        |
| ⑤   | MINI TIE         | PE MINI TIE(POSSESS METAL)                                                      | 2PCS  |        |
| ④   | POLYETHYLENE BAG | POLYETHYLENE BAG                                                                | 1PCS  |        |
| ③   | OVER MOLD        | 88A PVC yellow                                                                  | 2PCS  |        |
| ②   | CONNECTOR        | RJ45 8P8C' S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent Blue | 2PCS  |        |
| ①   | CABLE            | S/FTP CAT. 6A 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2±0.2MM     | 1PCS  |        |
| NO. | PARTS NAME       | SPECIFICATION STANDARD                                                          | QT' Y | REMARK |

|                              |            |               |
|------------------------------|------------|---------------|
| COLOUR:yellow (PANTONE:135C) |            |               |
| ITEM NO.                     | LENGTH (L) | TOLERANCE (T) |
| 21. 15. 2972                 | 300mm      | ± 10mm        |
| 21. 15. 2820                 | 500mm      | ± 15mm        |
| 21. 15. 2821                 | 1000mm     | ± 30mm        |
| 21. 15. 2824                 | 1500mm     | ± 45mm        |
| 21. 15. 2822                 | 2000mm     | ± 60mm        |
| 21. 15. 2823                 | 3000mm     | ± 90mm        |
| 21. 15. 2825                 | 5000mm     | ± 150mm       |
| 21. 15. 2826                 | 7500mm     | ± 210mm       |
| 21. 15. 2827                 | 10000mm    | ± 300mm       |
| 21. 15. 2828                 | 15000mm    | ± 450mm       |
| 21. 15. 2829                 | 20000mm    | ± 600mm       |

|              |                                                           |              |              |              |              |
|--------------|-----------------------------------------------------------|--------------|--------------|--------------|--------------|
| ITEM NO.     | 21. 15. 2972                                              | 21. 15. 2820 | 21. 15. 2821 | 21. 15. 2822 | 21. 15. 2823 |
| 21. 15. 2824 | 21. 15. 2825                                              | 21. 15. 2826 | 21. 15. 2827 | 21. 15. 2828 | 21. 15. 2829 |
| DESC.        | ROLINE S/FTP PatchCord CAT. 6A, LSOH, Comp. Level, yellow |              |              |              |              |

SECOMP

|    |     |                               |            |      |  |
|----|-----|-------------------------------|------------|------|--|
|    |     |                               |            |      |  |
|    |     |                               |            |      |  |
|    |     |                               |            |      |  |
|    |     | NEW                           | 2016-09-13 | A    |  |
| BY | CHK | REVISION RECORD MODIFICATIONS | DATE       | REV. |  |