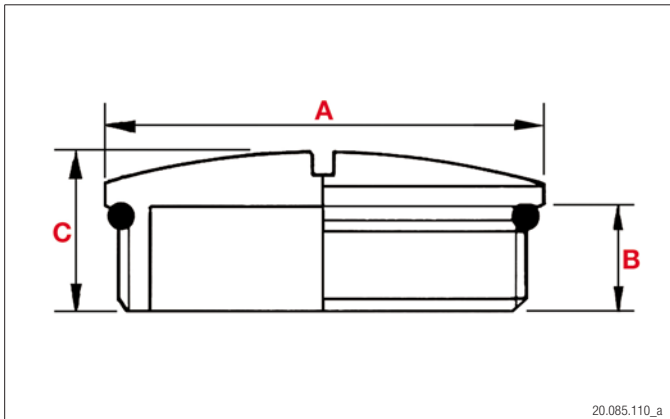



BLISTO MS OR (PG)



MAT Messing vernickelt
Laiton nickelé
Nickel plated brass

RoHS

TEMP -25°C bis +120°C
-25°C à +120°C
-25°C to +120°C

 IP 68 bis 5 bar
IP 68 à 5 bar
IP 68 to 5 bar

NORM DIN 40430

Verschlussschraube MS OR



Selbstdichtende Ausführung mit O-Ring 70 Sh A.

Bouchon de fermeture MS OR

Auto-étanchéifiant avec joint torique 70 Sh A.

Dome plug MS OR

With O-ring 70 Sh A.

	A mm	B mm	C mm		Plica-Nr.	E-Nr.	VE
PG7	14	5	7	vernickelt	91.6703.072	126 236 000	100
PG9	17	6	8	vernickelt	91.6703.099	126 236 001	100
PG11	20	6	8	vernickelt	91.6703.110	126 236 002	100
PG13.5	22	6.5	8.5	vernickelt	91.6703.137	126 236 003	100
PG16	24	6.5	9.0	vernickelt	91.6703.161	126 236 004	100
PG21	30	7	10	vernickelt	91.6703.218	126 236 005	100
PG29	39	8	11	vernickelt	91.6703.293	126 236 006	50
PG36	50	9	14	vernickelt	91.6703.366	126 236 007	50
PG42	57	10	15	vernickelt	91.6703.421	126 236 019	25
PG48	64	10	15	vernickelt	91.6703.488	126 236 009	25
PG2"	64	10	16	vernickelt	91.6703.598	126 236 008	25