


ADAPTER PA 6KT GFK (metr./PG)

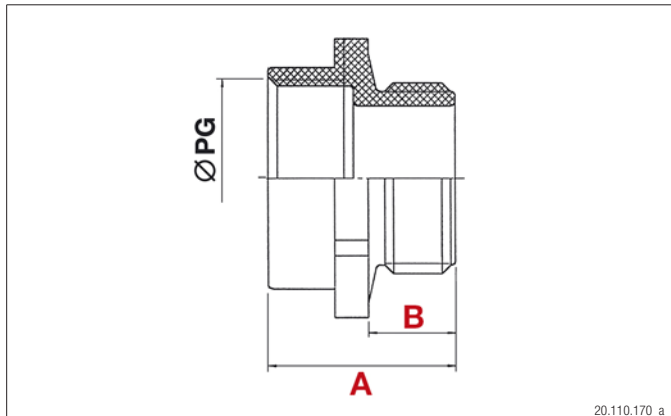

MAT

PA 6 / GFK

RoHS

TEMP

-30°C bis +100°C
-30°C à +100°C
-30°C to +100°C



Brennbar UL 94 HB
Inflammable UL 94 HB
Inflammable UL 94 HB

Zwischenstutzen PA 6KT GFK

Aussengewinde metrisch, Innengewinde PG. Selbstdichtend dank konisch geformtem Gewindeansatz.

Adaptateur PA 6KT GFK

Filetage mâle métrique, filetage femelle PG. Étanche grâce à la forme conique de la bride.

Adapter PA 6KT GFK

Male thread metric, female thread PG. Liquidtight due to the conical shape of the flange.

		A mm	B mm	 mm			Plica-Nr.	E-Nr.	VE
M12	PG7	21.0	8	15			90.7208.1207	126 391 120	50
M16	PG9	24.5	11	19			90.7208.1609	126 391 161	50
M20	PG11	26.5	11	22			90.7208.2011	126 391 202	50
	PG13	26.0	11	24			90.7208.2013	126 391 203	50
M25	PG16	29.0	11	27			90.7208.2516	126 391 254	20
	PG21	31.0	11	32			90.7208.2521	126 391 255	20
M32	PG29	33.0	11	42			90.7208.3229	126 391 326	25
M40	PG29	34.0	11	42			90.7208.4029	126 391 406	20
M50	PG42	39.0	11	60			90.7208.5042	126 391 509	10
M63	PG48	40.0	11	65			90.7208.6348	126 391 638	5