


ADAPTER PA 6KT GFK (PG/metr.)



20.110.160_a

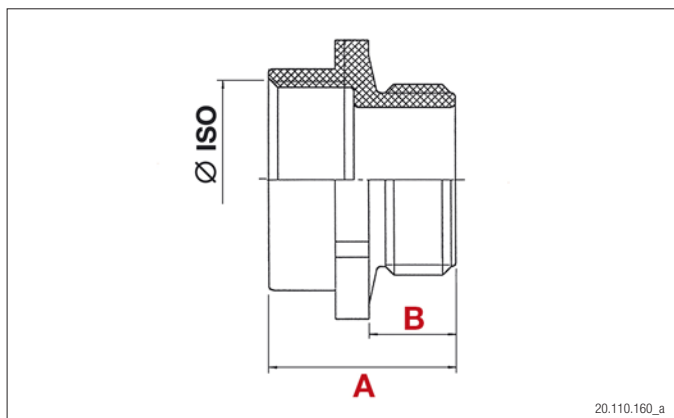

20.110.160_b

MAT

PA 6 / GfK

RoHS
TEMP

 -30°C bis +100°C
 -30°C à +100°C
 -30°C to +100°C

 Brennbar UL 94 HB
 Inflammable UL 94 HB
 Inflammable UL 94 HB

Zwischenstutzen PA 6KT GFK

Aussengewinde PG, Innengewinde metrisch. Selbstdichtend dank konisch geformtem Gewindeansatz.

Adaptateur PA 6KT GFK

Filetage mâle PG, filetage femelle métrique. Etanche grâce à la forme conique de la bride.

Adapter PA 6KT GFK

Male thread PG, female thread metric. Liquidtight due to the conical shape of the flange.

		A mm	B mm				Plica-Nr.	E-Nr.	VE
PG11	M16	20.0	8	22			907.2081.116	126 390 216	100
	M20	20.0	8	24			907.2081.120	126 390 220	50
PG13	M20	21.0	9	24			907.2081.320	126 390 320	100
	M25	21.5	9	30			907.2081.325	126 390 325	50
PG16	M20	22.0	10	27			907.2081.620	126 390 420	50
	M25	22.5	10	30			907.2081.625	126 390 425	50
PG21	M25	23.5	11	33			907.2082.125	126 390 525	50
	M32	23.5	11	37			907.2082.132	126 390 532	50
PG29	M32	25.5	11	42			907.2082.932	126 390 632	50
	M40	25.5	11	45			907.2082.940	126 390 640	20