


FS MS



80.080.020_a

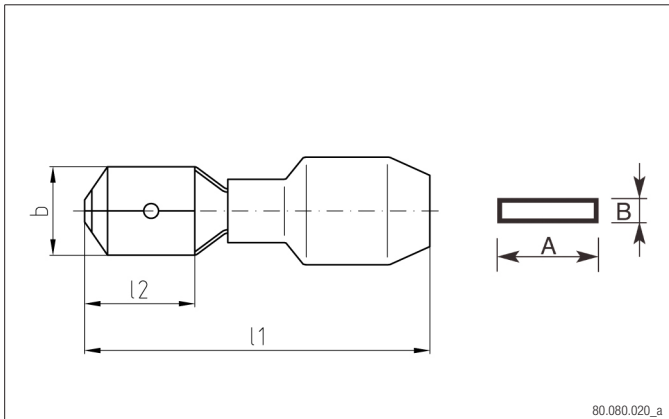

80.080.020_b

MAT

Messing, galvanisch verzinkt

RoHS

Flachstecker FS MS

Werkstoff Ms, Isolation PVC bzw. PC. Oberfläche galvanisch verzinkt.

mm ²	A mm	B mm	l₁ mm	l₂ mm	KG/100				Plica-Nr.	E-Nr.	VE
PVC Isolation											
0.5 – 1.0	2.8	0.8	19.2	6.5	0.08	100		verzinkt	61.4800.040		100
	4.8	0.8	19.8	6.7	0.09	100		verzinkt	61.4800.070		100
	6.3	0.8	21.8	7.7	0.10	100		verzinkt	61.4800.080	156 480 009	100
1.5 – 2.5	4.8	0.8	19.8	6.7	0.09	100		verzinkt	61.4800.250		100
	6.3	0.8	21.8	7.7	0.11	100		verzinkt	61.4800.300	156 480 109	100
4 – 6	6.3	0.8	24.0	7.7	0.18	100		verzinkt	61.4800.340	156 480 209	100
PC Isolation											
0.5 – 1.0	2.8	0.8	19.2	6.5	0.08	100		verzinkt	61.4800.815		100
	4.8	0.8	19.8	6.7	0.09	100		verzinkt	61.4800.816		100
	6.3	0.8	21.8	7.7	0.10	100		verzinkt	61.4800.817		100
1.5 – 2.5	4.8	0.8	19.8	6.7	0.09	100		verzinkt	61.4800.820		100
	6.3	0.8	21.8	7.7	0.11	100		verzinkt	61.4800.818		100
4 – 6	6.3	0.8	24.0	7.7	0.18	100		verzinkt	61.4800.819		100