


KV ECEA MS EEXe (metr.)



20.062.040_a

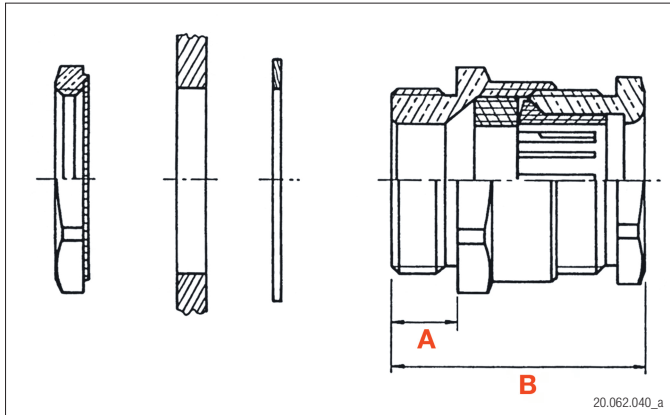

20.062.040_b

MAT Messing vernickelt
Laiton nickelé
Nickel plated brass

TEMP -20°C bis +80°C
-20°C à +80°C
-20°C to +80°C

IP 66 bis 5 bar
IP 66 à 5 bar
IP 66 to 5 bar

Neopren / Polycarbonat
Néoprène / polycarbonate
Neoprene / polycarbonate

NORM NFC 68312. Nr. LCIE 8261 149 X

NF
NORME FRANÇAISE

Ex

RoHS

ATEX

Kabelverschraubung ECEA MS EEXe

Ex-geschützt mit erhöhter Sicherheit. Mit Gegenmutter geliefert.

Presse-étoupe ECEA MS EEXe

Protection contre l'explosion, sécurité augmentée. Livré avec contre-écrou.

Cable gland ECEA MS EEXe

For hazardous locations with advanced security. Delivered with lock nut.

	> Ø < mm	A mm	B mm	 mm			Plica-Nr.	E-Nr.	VE
M12	2.5-6	7	27.0	13/14		vernicket	92.4105.012	121 395 303	50
M16	3.5-8	7	26.5	16/18		vernicket	92.4105.016	121 395 403	50
M20	7-12	7	30.0	20/22		vernicket	92.4105.020	121 395 503	50
M25	10-18	8	35.0	28/30		vernicket	92.4105.025	121 395 603	20
M32	14-24	8.5	40.0	38/40		vernicket	92.4105.032	121 395 703	20
M40	22-30	8.5	46.0	48/50		vernicket	92.4105.040	121 395 803	20
M50	32-40	9.5	61.5	60/64		vernicket	92.4105.050	121 395 903	10