


PLICAFIX CFC



30.040.120.1

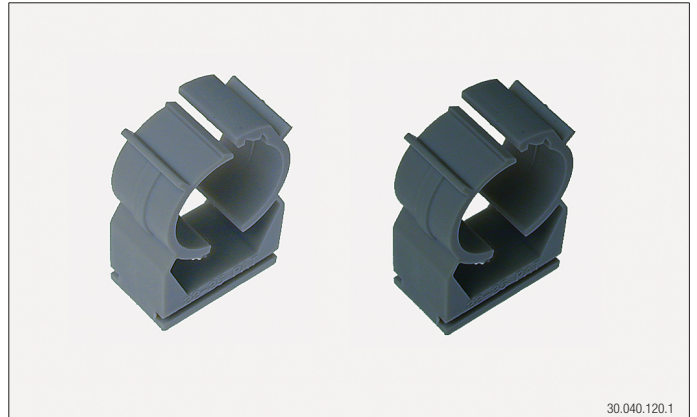

30.040.120.1

MAT

PVC
CPV
PVC

RoHS

TEMP

-15°C – +80°C



nicht ausbreitend
non propagateur
no propagator

NORM

EN 61386

HALO

halogenfrei
sans halogène
halogen-free

Rohrhalter PLICAFIX CFC

Schnellbefestigungs-Halter mit Befestigungsloch M6.
Schlagfest.

Support de tube PLICAFIX CFC

Support à fermeture rapide avec trou de fixation M6.
Résistant au choc.

Tube holder PLICAFIX CFC

Clip tube holder with fixation hole M6.
Choc resistant.

NORM metr.	> Ø < mm		Plica-Nr.	E-Nr.	VE
M16	15-16		11.4010.016	126 024 210	100
M20	18-20		11.4010.020	126 024 220	100
M25	22-25		11.4110.020	126 180 221	100
M25	22-25		11.4005.025	126 024 230	100
M25	22-25		11.4110.025	126 180 231	100
M32	30-32		11.4005.032	126 024 240	50
M32	30-32		11.4105.032	126 180 241	50
M40	35-40		11.4002.540	126 024 250	25
M40	35-40		11.4102.540	126 180 251	25
M50	47-50		11.4002.550	126 024 260	25
M50	47-50		11.4102.550	126 180 261	25
M63	58-64		11.4001.063	126 024 270	20