


S



10.030.020_a

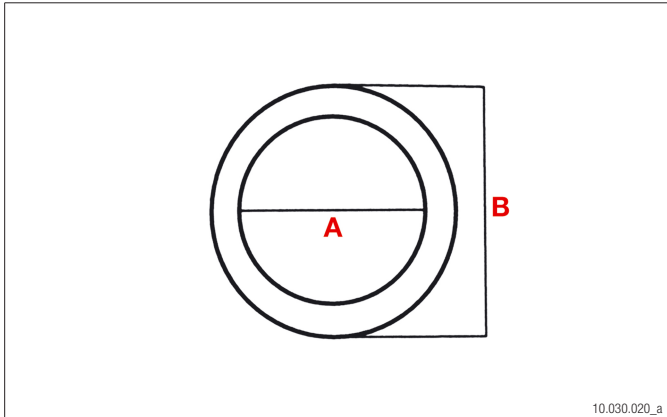

10.030.020_b

MAT

Stahl galvanisch verzinkt
Acier galvanisé zingué
Galvanized steel



TEMP

-50°C – +250°C



6 J



2200 N / 50 mm

Metallschlauch S

Sehr hohe Flexibilität. Hoher mechanischer Schutz. Spiralgewickelt, einfachgefalt.

Gaine métallique S

Très haute flexibilité. Haute protection mécanique. Bobinage hélicoïdale, simple agraissage.

Metall conduit S

Very high flexibility. For high mechanical protection. Helically wound, simple folded.

NORM NW/DN	A mm	B mm	 mm		Plica-Nr.	E-Nr.	VE
10	6.8	9.0	25	verzinkt	81.0010.810	125 482 199	50
12	10.3	13.0	30	verzinkt	81.0010.812	125 482 299	50
16	13.0	16.0	35	verzinkt	81.0010.816	125 482 399	50
20	16.9	20.5	45	verzinkt	81.0010.820	125 482 499	50
25	21.4	25.0	55	verzinkt	81.0010.825	125 482 599	50
32	28.1	32.0	60	verzinkt	81.0010.832	125 482 699	25
40	37.7	42.5	80	verzinkt	81.0010.840	125 482 799	25
50	48.4	53.0	90	verzinkt	81.0010.850	125 482 899	25
63	57.5	62.5	115	verzinkt	81.0010.863	125 482 999	25
75	70.0	77.0	150	verzinkt	81.0010.875	125 483 099	10