



All NK products are UL recognized.

Screw mount standard cable clamp

Features

- No slipping of screwed area when mounted, since the mating faces have slip stoppers.




Screw mounting

Material


- Nylon 66 (Color : Natural)

UL94 V-2


A type

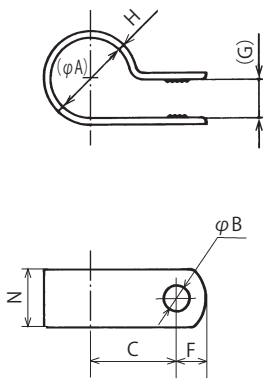

B type

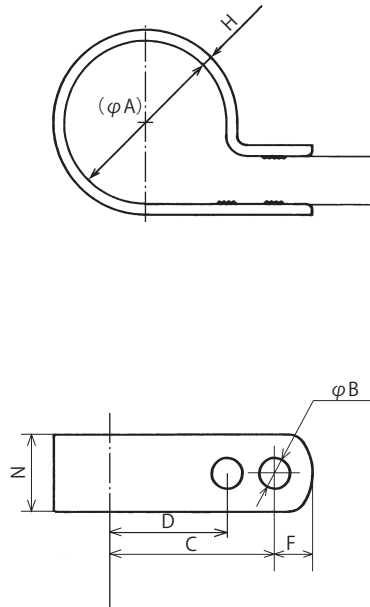

C type

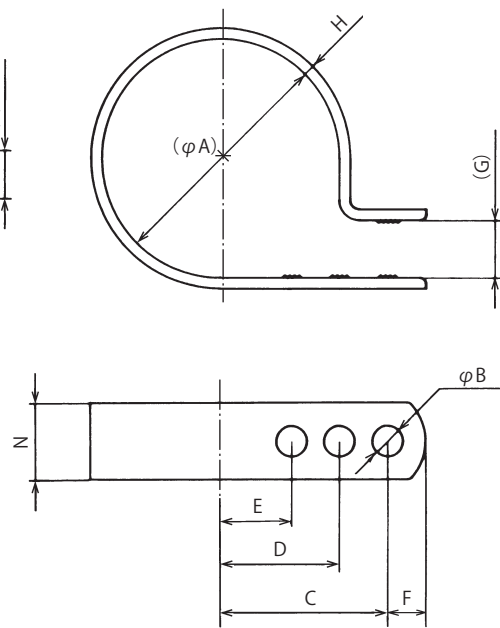

Part No.	Type	Diameter and dimension									Inner diameter			Std. Package
		(φA)	φB	C	D	E	F	(G)	H	N	Outer hole	Center hole	Inner hole	
NK-2N	A	3.3	4.3	9.5	—	—	4.8	3.2	1.1	9.5	3.0	—	—	100 pcs.
NK-3N		5.3		10.3	—	—		4.8			4.6	—	—	
NK-4N		6.8		11.1	—	—		6.3			5.6	—	—	
NK-5N		8.4		11.9	—	—		6.3			7.4	—	—	
NK-6N		10.6		12.7	—	—		6.3			10.0	—	—	
NK-7N		12.2		13.5	—	—		6.3			10.7	—	—	
NK-8N		13.2		14.3	—	—		6.3			11.9	—	—	
NK-9N		15.2		15.1	—	—		6.3			13.5	—	—	
NK-10N		16.0		15.9	—	—		6.3			14.0	—	—	
NK-11N		19.0		17.5	—	—		6.3			16.8	—	—	
NK-12N	19.8	18.2	—	—	6.3	7.9	1.8	12.7	17.8	—	—	50 pcs.		
NK-13N	22.1	19.0	—	—					20.8	—	—			
NK-14N	22.9	19.8	11.9	—					21.3	—	18.5			
NK-16N	26.9	21.4	13.5	—					24.4	—	22.3			
NK-18N	29.2	23.0	15.1	—					26.7	—	24.1			
NK-24N	39.4	27.8	19.8	11.9					37.3	35.0	31.2		25 pcs.	
NK-32N	52.1	34.1	24.6	13.5					9.5	51.0	46.2			43.7