


Insaver Slim UGR19 175 IP44 1275lm 930 0030438

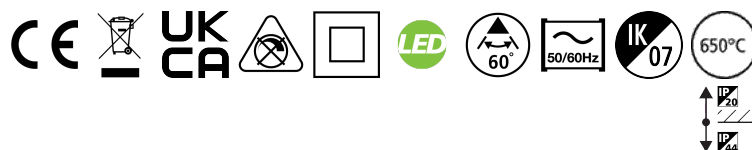

Features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 13W; 1275lm; 98lm/W; CRI90; 50000 hrs (L80); 3000K; UGR <19 with shallow product depth 65mm.


Product Overview

Product name	Insaver Slim UGR19 175 IP44 1275lm 930
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality
ETIM Class	EC001744
Fixture luminous flux (lm)	1275
Luminaire efficacy (lm/W)	98
Colour temperature (K)	3000
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	60
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	13
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white


Insaver Slim UGR19 175 IP44 1275lm 930
0030438

IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288304380
Warranty	5 years

Photometry

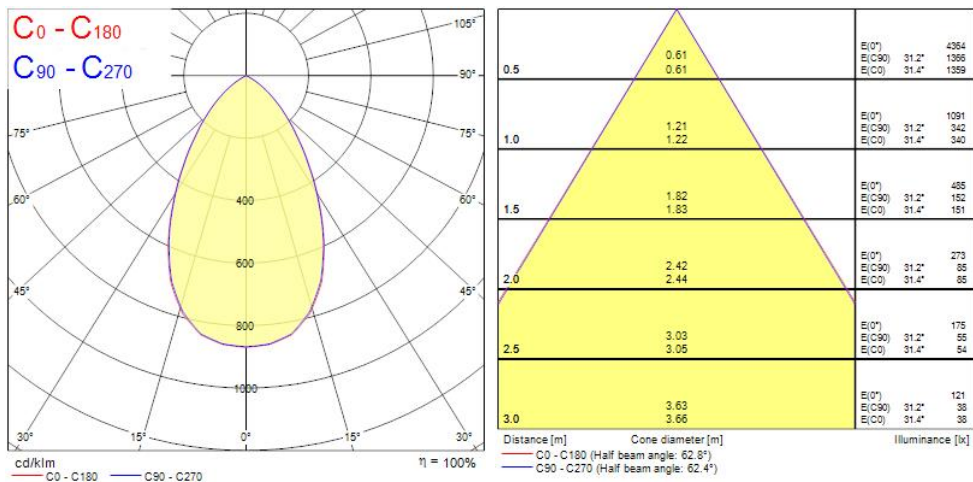

Technical drawings

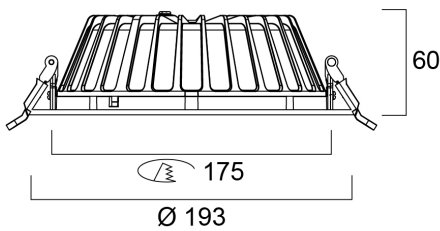

Insaver Slim UGR19 175 IP44 1275lm 930 0030438

Data table

GENERAL DATA

Product name	Insaver Slim UGR19 175 IP44 1275lm 930
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality
Operating temperature range (°C)	-10°C - 40°C
ETIM Class	EC001744
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1275
Luminaire efficacy (lm/W)	98
Colour temperature (K)	3000
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	60
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	13
Mains voltage (V)	220-240V~
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Drive current (mA)	390
Inrush Current (A)	17.5

Insaver Slim UGR19 175 IP44 1275lm 930 0030438

Inrush Duration (µs)	188
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	29
Max. Luminaires per 13A C Breaker	37
Max. Luminaires per 16A C Breaker	46
Max. Luminaires per 20A C Breaker	58
Max. Luminaires per 10A B Breaker	17
Max. Luminaires per 13A B Breaker	22
Max. Luminaires per 16A B Breaker	27
Max. Luminaires per 20A B Breaker	34

LIFETIME DATA

Lifespan L70 B50	50000
Lifespan L80 B10	50000
Lifespan L90 B10	43000

PHYSICAL DATA

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Nominal Product Length (mm)	195
Nominal Product Width (mm)	195
Nominal Product Height (mm)	60
Nominal Product Diameter (mm)	195
Weight (kg)	0.55

PACKAGING

Single packaging type	Carton
Product EAN number	5410288304380
Packaging single length / height (cm)	20.5
Packaging single width (cm)	20.5
Packaging single depth (cm)	7.3

Insaver Slim UGR19 175 IP44 1275lm 930 0030438

DUN14 (outer)	15410288304387
Units per outer package	16
Packaging outer length / height (cm)	42.5
Packaging outer width (cm)	42.5
Packaging outer depth (cm)	31.0

SAFETY DATA

Optimal operating condition (°C)	-10-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

Insaver Slim UGR19 175 IP44 1275lm 930
0030438

Energy label

SYLVANIA

0030438



This luminaire contains built-in LED lamps

A⁺⁺

A⁺

A

B

C

D

E

}

L

E

D

The lamps cannot be changed in the luminaire.

874/2012

