

## SylProof ToLEDo T8 Twin 1200 IP65 3300Lm 865 0042801




### Features

- Weatherproof luminaire delivered together with exchangeable ToLEDo T8 LED tubes. Easy to install with stainless steel fixing brackets for ceiling mounting. Polycarbonate housing and diffuser. 6500K; 39W; 3300lm; 85lm/W and 25,000 hours lifetime. IP65; IK08; Class I; 1260mm x 99mm x 78mm


### Product Overview

Product name	SylProof ToLEDo T8 Twin 1200 IP65 3300Lm 865
Technology	LED (replaceable lamp)
Cap/Base	G13
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Logistics & Industry
ETIM Class	EC002892
Fixture luminous flux (lm)	3300
Luminaire efficacy (lm/W)	85
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Photobiological Risk Group	Not applicable
Total power consumption (W)	39
Electrical protection	Class I
Dimmable	No
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288428017
Warranty	3 years

### Photometry

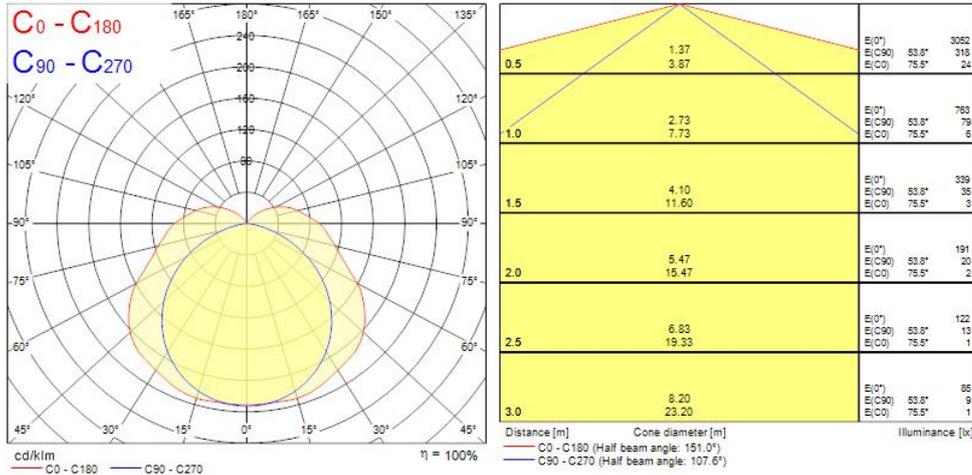

### Technical drawings



### Data table

#### GENERAL DATA

<b>Product name</b>	SylProof ToLEDo T8 Twin 1200 IP65 3300Lm 865
<b>Technology</b>	LED (replaceable lamp)
<b>Cap/Base</b>	G13
<b>Housing</b>	PC Polycarbonate
<b>Mount</b>	Ceiling surface mounting
<b>General application</b>	Logistics & Industry

## SylProof ToLEDo T8 Twin 1200 IP65 3300Lm 865 0042801

ETIM Class	EC002892
Warranty	3 years

### OPTICAL DATA

Fixture luminous flux (lm)	3300
Luminaire efficacy (lm/W)	85
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Distribution type	Direct
Photobiological Risk Group	Not applicable
Lumen maintenance at end of nominal life (%)	70

### ELECTRICAL DATA

Total power consumption (W)	39
Mains voltage (V)	220-240V~
Lamp power factor	1
Electrical protection	Class I
Control gear required	No
No. Of switching cycles before premature failures	>200000
Dimmable	No
Nominal Frequency (Hz)	50/60Hz

### PHYSICAL DATA

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1260
Nominal Product Width (mm)	99
Nominal Product Height (mm)	78

## SylProof ToLEDo T8 Twin 1200 IP65 3300Lm 865 0042801

Nominal Product Diameter (mm)	Not applicable
Weight (kg)	1.69

### PACKAGING

Single packaging type	Carton
Product EAN number	5410288428017
Packaging single length / height (cm)	126.8
Packaging single width (cm)	11.0
Packaging single depth (cm)	8.0
DUN14 (outer)	15410288428014
Units per outer package	72
Packaging outer length / height (cm)	128.5
Packaging outer width (cm)	74.0
Packaging outer depth (cm)	90.0

### SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No