



IEC	35 - 120 mm ² (Cu) 11 Nm		10 x 15,5 x 0,8 (Cu) 11 Nm
UL	AWG 2 - MCM 250 75 °C copper 97 lb-in	-	10 x 15,5 x 0,8 75 °C copper 97 lb-in
	12 - 18 mm		

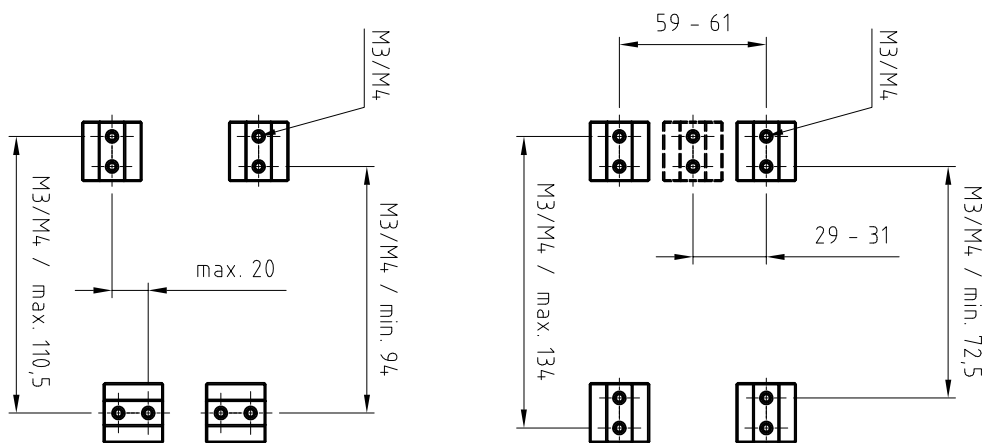

For further information: www.rittal.com



Raum für Verpackungsdatum
Area for date of packing
(MMJJTT / MMYDD)

SV

9342.504

9342.514



1 SV CB-Geräteadapter 160A, 4-polig

60 mm Schienenmittenabstand

1 SV Circuit-breaker component adaptor 160A, 4 poles

60 mm busbar centre distance

1 SV Adaptateurs de disjoncteurs 160A, 4 pôles

60 mm d'écartement entre les axes des barres

Article No.	SV9342.504, SV9342.514	
Suitable for use on a circuit capable of delivering not more than SCCR symmetrical amperes [kA]	Maximum voltage AC [V]	Maximum condition when protected by
65	480	Circuit breaker (UL category DIVQ/7) rated up to 125A, having an interrupting rating not less than 65kA symmetrical amperes
50	600	Class K5 125A Fuses


Zchnng.-Nr. / No. of dwg. : A07129001SV

Versandbeutel-Nr. / No. of accessory bag : -


Lieferanten-Nr. / No. of supplier :

1


SV9342.504

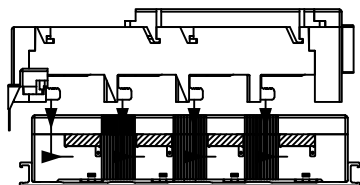


SV9342.514

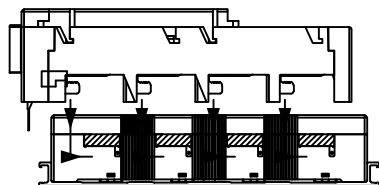


2

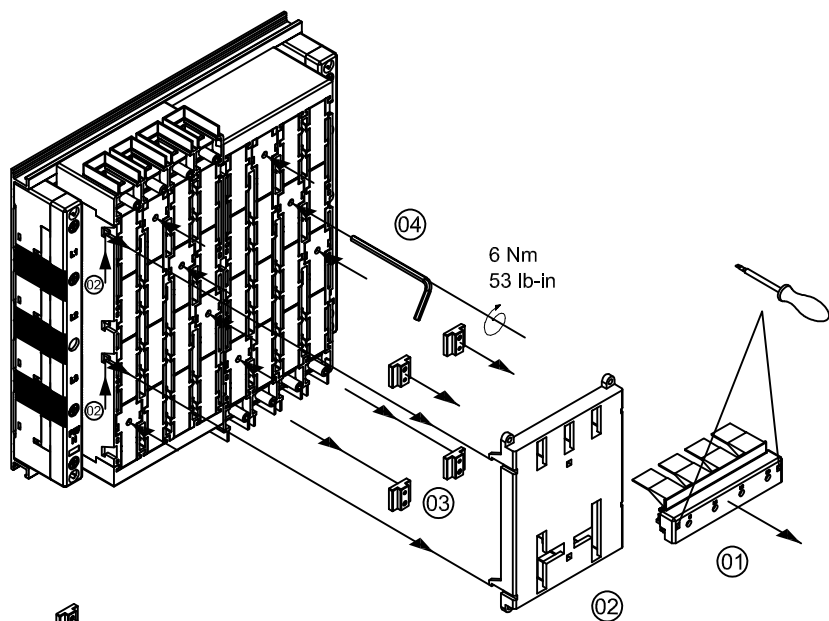


3

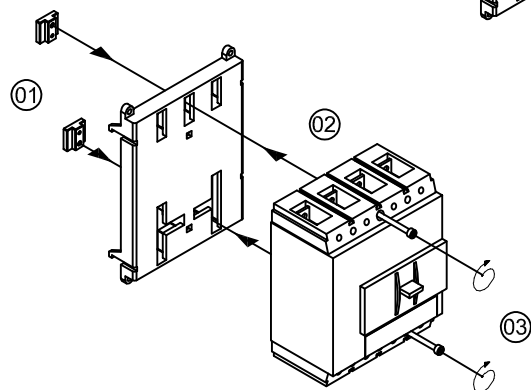

4

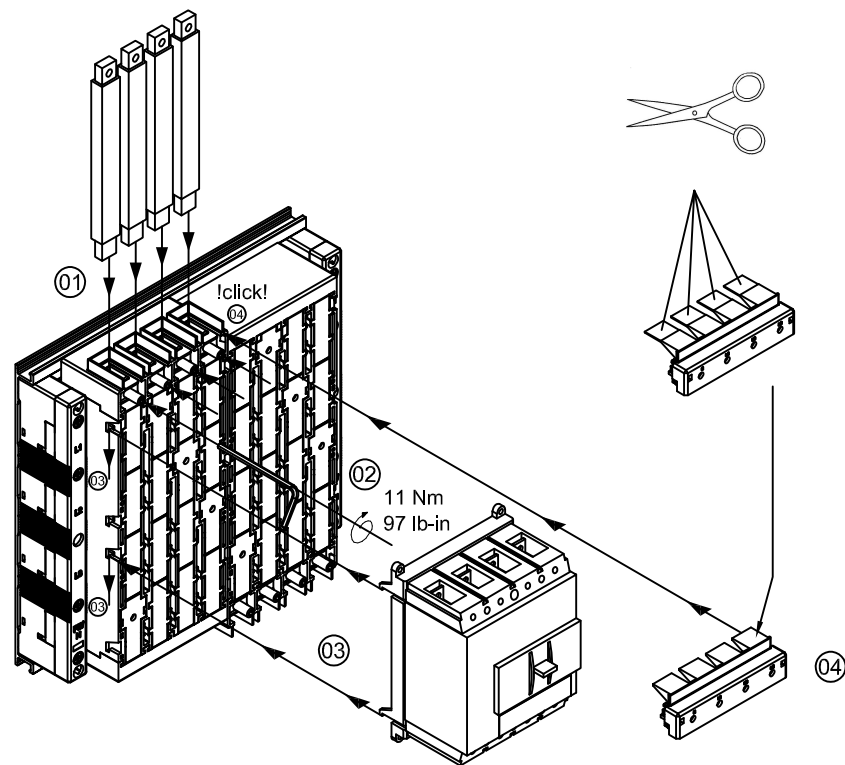

5

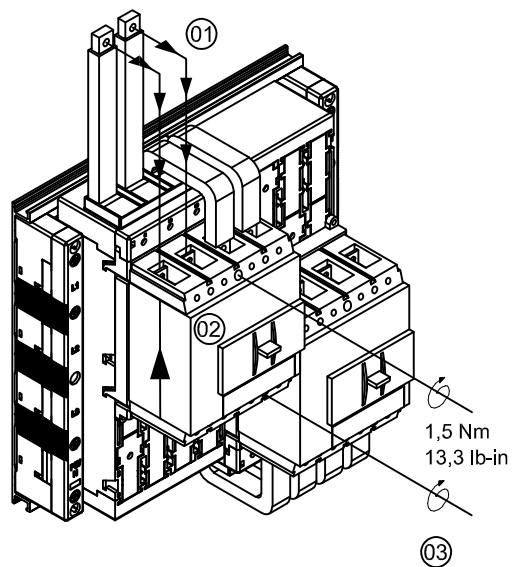

6

