





Auer Signal

Beacon series R

-30°C to +60°C [-22°F to +140°F]

IP66
UL Type 4, 4X, 13

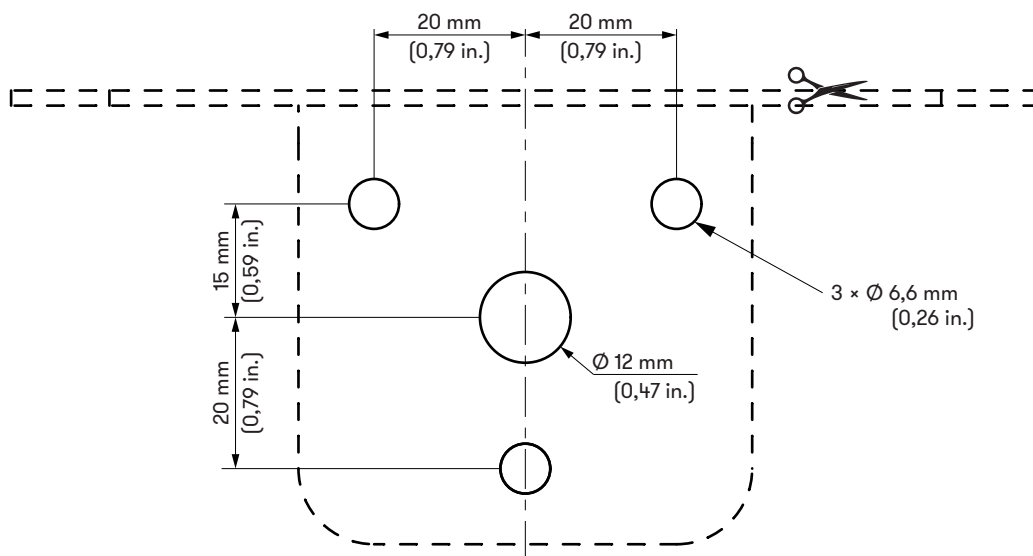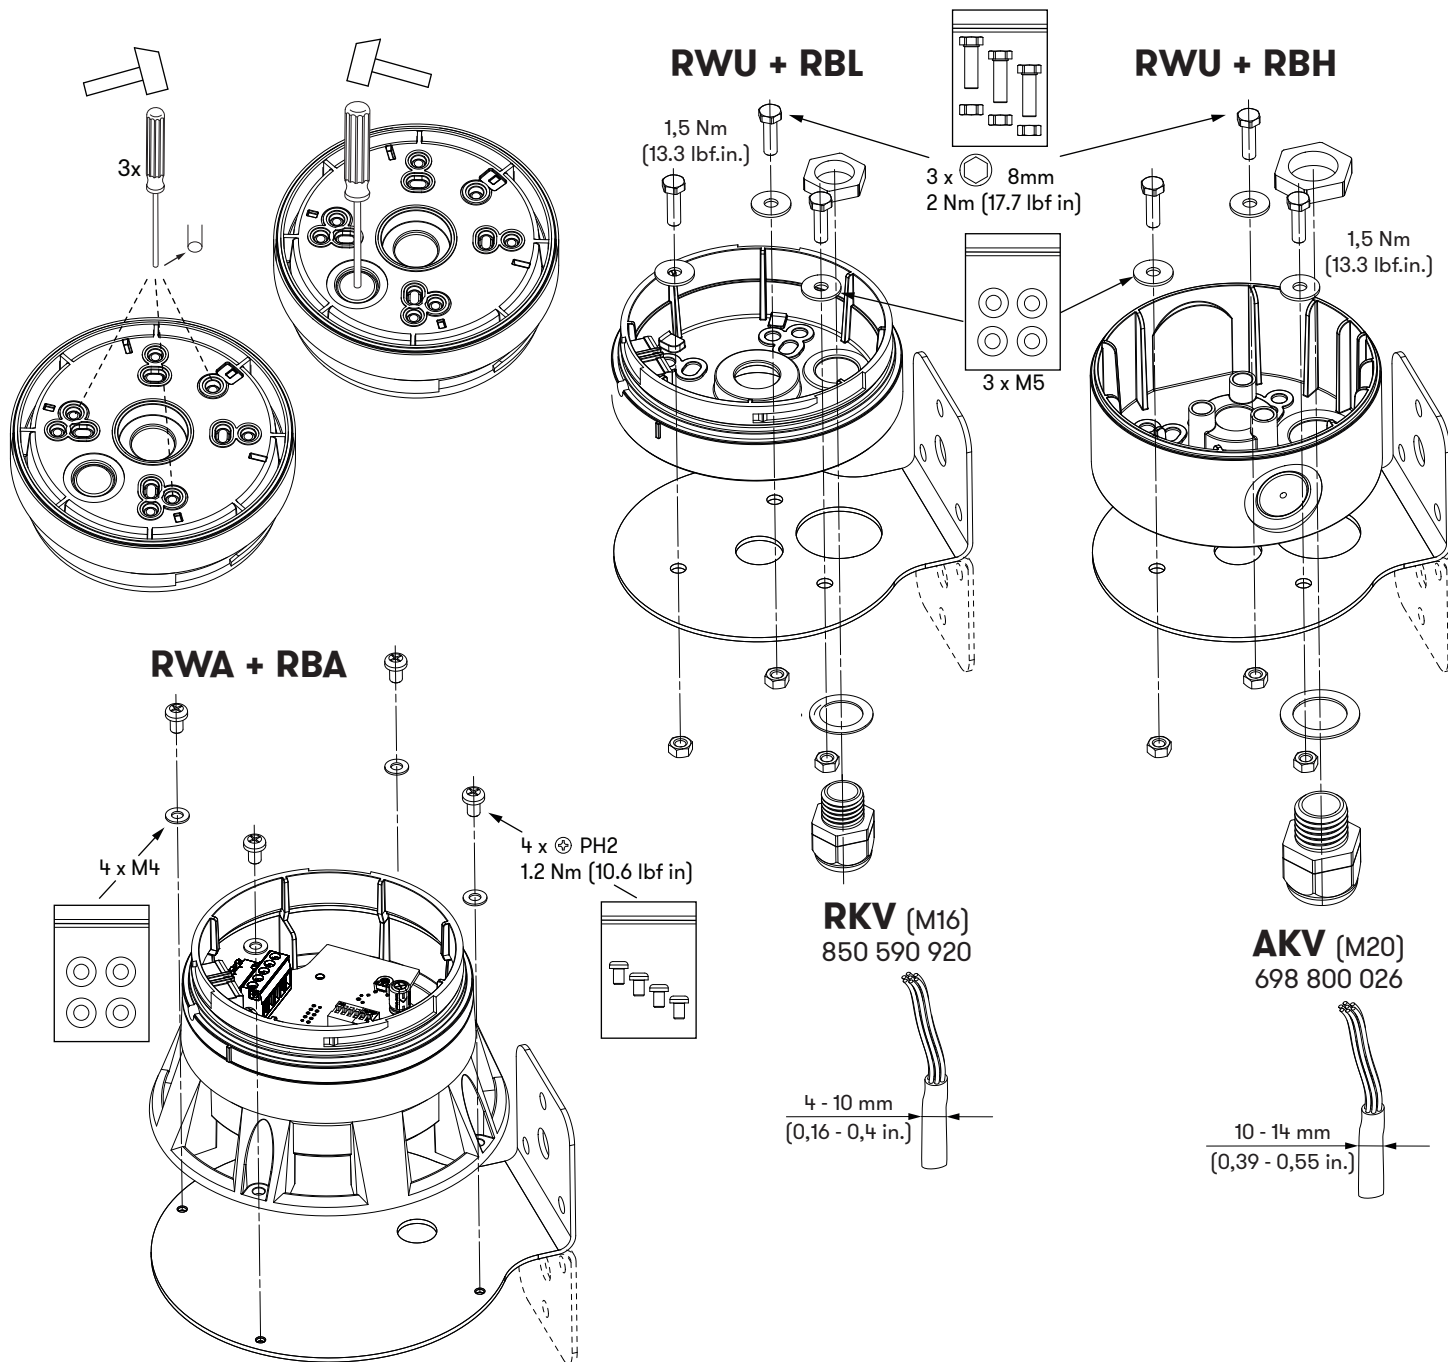

Vertrieb:

RWD + RBL

IP66
UL Type 4, 4X, 13

RG2 (850 590 910)

Flat gasket to seal on smooth enclosures

Joint d'étanchéité plat utilisable sur boîtiers lisses

Flachdichtung zur Abdichtung auf glatten Gehäusen

Guarnizione piana per l'impermeabilizzazione sugli alloggiamenti lisci

Vedação plana para vedar em compartimentos lisos

Junta plana para el sellado en carcasas lisas

