



PROTM

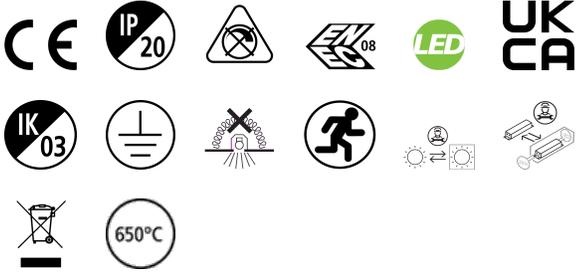

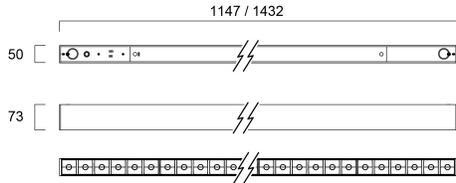

Distance [m]	Cone diameter [m]		Illuminance [lx]	
0.5	0.80	0.73	E(0°)	1094
			E(30°)	3514
1.0	1.61	1.46	E(0°)	2748
			E(30°)	854
1.5	2.41	2.19	E(0°)	1200
			E(30°)	220
2.0	3.22	2.92	E(0°)	686
			E(30°)	163
2.5	4.02	3.65	E(0°)	439
			E(30°)	106
3.0	4.82	4.38	E(0°)	305
			E(30°)	73

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (half beam angle: 72.2°)
 — C90 - C270 (half beam angle: 77.6°)

