


# Sylvania Granit IP65 0-10V 32000lm 840 MB

Code article 0039739

**SYLVANIA**


**PRO**<sup>TM</sup>

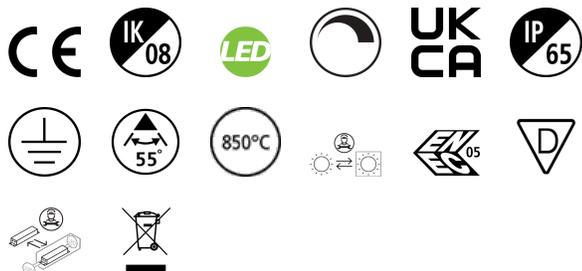

Integrated LED highbay; Black aluminium housing; 32000lm; 200 W; 160 Lm/W; 4000K; Drive current: 780mA; CRI 80; 55° beam angle; 0-10V dimmable; IP65; IK08; Lifespan L80:B20 92,000 hrs; (D x H) 370 x 163 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.

## Atouts techniques

### Dimensions (mm)

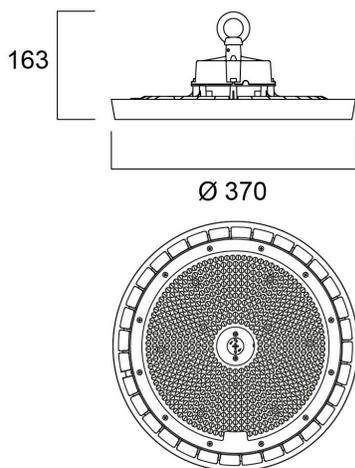


### Photométrie

0.5	0.49	E(0°)	18894
		E(C0°)	8199
1.0	0.99	E(0°)	42148
		E(C0°)	18207
1.5	1.47	E(0°)	18733
		E(C0°)	8013
2.0	1.96	E(0°)	10537
		E(C0°)	3853
2.5	2.45	E(0°)	6744
		E(C0°)	2483
3.0	2.94	E(0°)	4983
		E(C0°)	1733

Distance [m]    Cone diameter [m]    Illuminance [lx]

— C0 - C180 (Half beam angle: 52.2°)

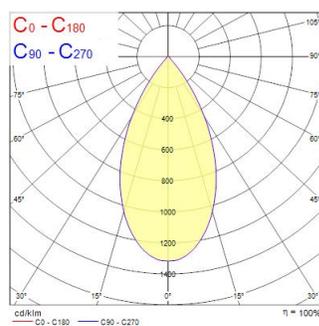

# Sylvania Granit IP65 0-10V 32000lm 840 MB

Code article 0039739

**SYLVANIA**

## Données générales

Nom du produit	Sylvania Granit IP65 0-10V 32000lm 840 MB
Technologie	LED
Cap/Base	N/A
General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+50°C
ETIM Class	EC001716
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	32000
Luminaire efficacy (lm/W)	160
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	55
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	200
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
No. Of switching cycles before premature failures	>100000
Dimmable	Yes
Dimming method	0-10V
Drive current (mA)	780
Courant d'appel (A)	100
Inrush Duration (µs)	300
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	4
Max. products per 13A C Breaker	5
Max. products per 16A C Breaker	7
Max. products per 20A C Breaker	9
Max. products per 10A B Breaker	2
Max. products per 13A B Breaker	6
Max. products per 16A B Breaker	4
Max. products per 20A B Breaker	5
Mains surge immunity (differential mode -> L-N) (kV)	6
Mains surge immunity (common mode -> L/N - GND) (kV)	6

## Durée de vie

Lifespan L70 B50	120000
Lifespan L80 B20	92000
Lifespan L90 B50	51000

# Sylvania Granit IP65 0-10V 32000lm 840 MB

Code article 0039739

**SYLVANIA**

## Données physiques

Housing colour	RAL 9017 - Traffic black
IP rating	IP65
IK rating	IK08
Nominal Product Height (mm)	163
Nominal Product Diameter (mm)	370
Poids (kg)	2.865

## Emballage

Product EAN number	5410288397399
Longueur simple de l'emballage (cm)	40.0
Largeur simple de l'emballage (cm)	40.0
Packaging single depth (cm)	14.5
DUN14 (inner)	05410288397399
Units per outer package	1
Packaging outer length / height (cm)	40.0
Packaging outer width (cm)	40.0
Packaging outer depth (cm)	14.5

## Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-30-50