



## ENVIRONMENTAL PRODUCT DECLARATION

**SITOP SEL1200**

**SITOP SEL1400**

**SITOP RED1200**

**SITOP CNX8600**

**SITOP PSE200U**

**SITOP CHO1400**

**SITOP PBM1200**

Type II according to ISO 14021 including life cycle impact assessment (LCIA)



# SIEMENS

# General information

This environmental product declaration (EPD) is based on the international standard ISO 14021 (“Environmental labels and declarations – Self declared environmental claims – Type II environmental labelling”). The data in this EPD has been evaluated on a full-scale life cycle assessment (LCA) study according to ISO 14040/44, taking into account the product category rules (PCR) for electronic and electrotechnical products and systems defined in EN 50693, as well as product specific rules (PSR) for low-voltage switchgear and control gear equipment in IEC TS 63058 ED1.0

Siemens is dedicated to an environmentally conscious design of its products in line with IEC 62430 and has implemented an integrated management system according to ISO 9001, ISO 14001 and ISO 45001.


Products	Please refer to annex
<b>Represented by the reference product</b>	6EP4437-7EB00-3CX0
<b>Product Description</b>	SITOP SEL1400 10 A Selectivity module 4-channel with limiting characteristic input: 24 V DC/40 A output: 24 V DC/4x 10 A threshold adjustable 2-10 A with monitoring interface *Ex approval no longer available*
<b>Functional Unit</b>	Production of 1 pc SITOP SEL1400 4 x245V / 10A and use over the reference service lifetime of 10 years. <sup>1</sup>

<sup>1</sup> The lifetime value used for calculation is a reference value and does not equate with the minimum, average or real life time.

# Material composition

The following chart outlines the overall material composition of the calculated reference product without packaging. Product weight of 0.27 kg adds up with packaging weight of 0.05 kg to a total weight of 0.32 kg. Packaging consists of: Corrugated box, average composition, Fixing material screws galvanized, Graphic Paper, PE film.


**Product Weight 0.27 kg**

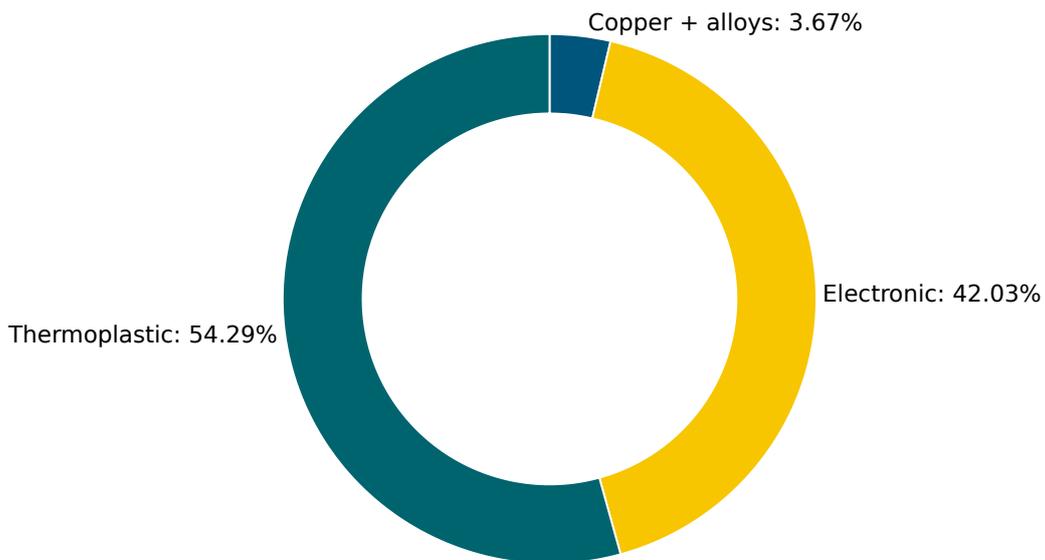

# Substance assessment

At Siemens, we are committed to the development and production of environmentally sound and sustainably produced equipment. This includes avoiding hazardous substances in our products without compromising their benefits for our customers. Please visit the following website to learn more about how we comply with product-related environmental regulations like RoHS, REACH, WEEE and others: [Product Related Environmental Protection](#)

## Life cycle stages and reference scenarios

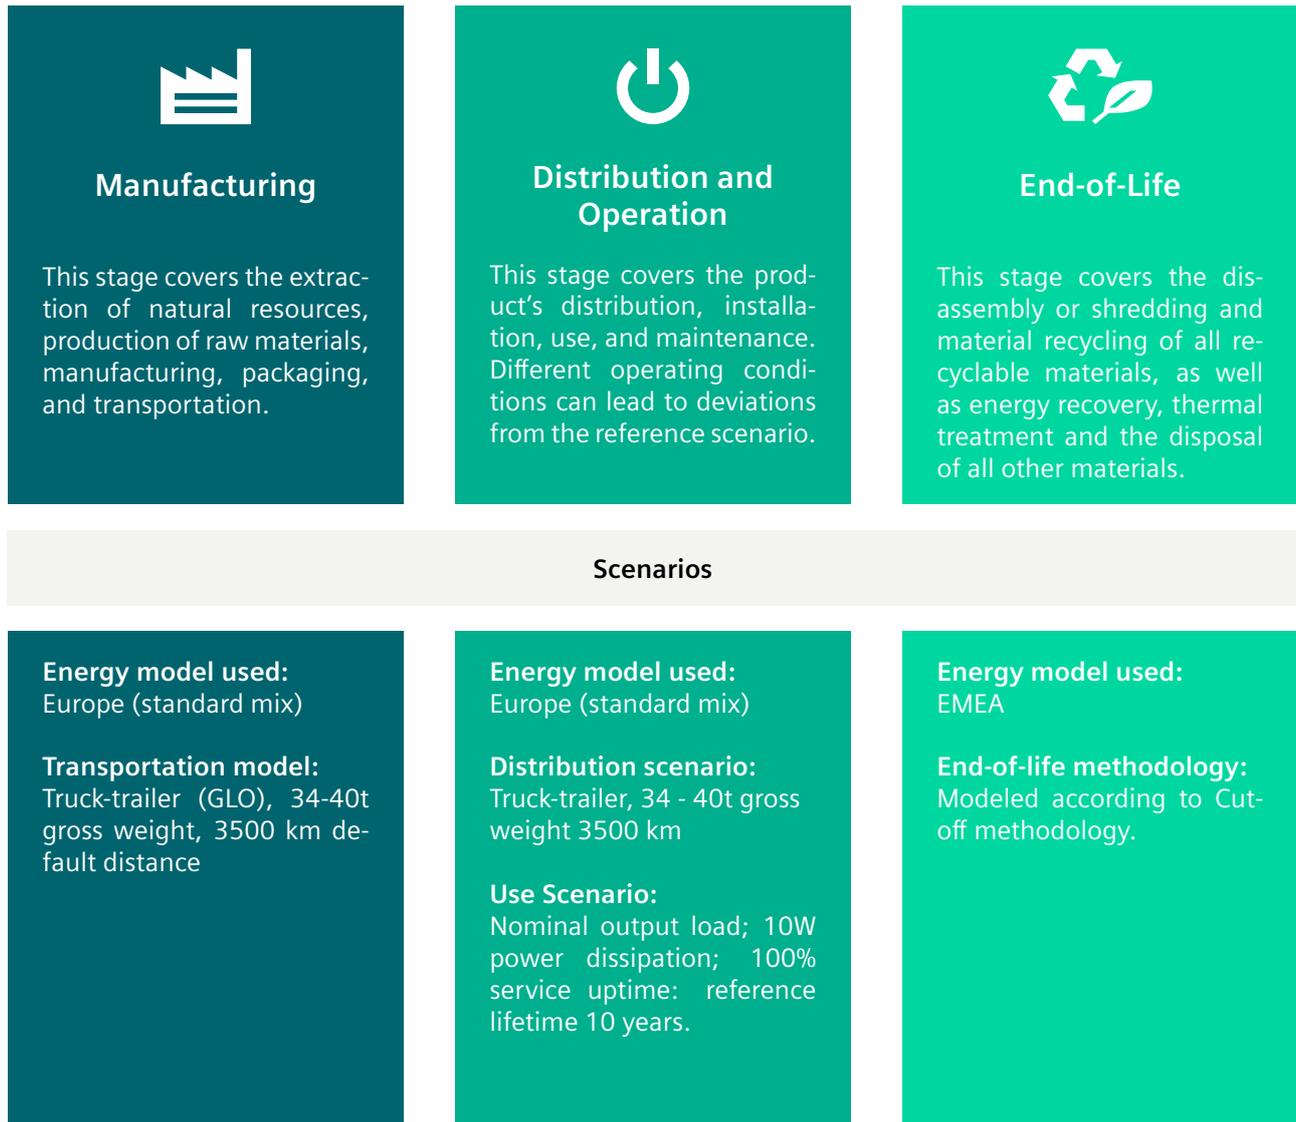

# Key environmental performance indicators


The following impact categories characterize the product's environmental footprint. They have been calculated with LCIA methodology EF3.1; LCA tool: Green Digital Twin (GDT), Database: One Siemens LCA Database (based on MLC CUP 2023.2, formerly GaBi).

To ensure the high quality and completeness of the LCA results, Primary Data have been used whenever possible. Datasets for resources, such as electrical energy or natural gas, are chosen from the region where the device is produced and assembled. If primary data are not available, datasets reflecting state-of-the-art manufacturing technology are considered.

Impact Category	Unit	Total	Manufacturing	Distribution	Operation	End-of-life
Acidification	Mole of H+ eq	6.63E-1	8.51E-2	1.05E-4	5.78E-1	1.34E-4
Climate change – total	kg CO <sub>2</sub> eq	2.87E+2	1.31E+1	8.21E-2	2.74E+2	3.06E-1
Climate change – fossil	kg CO <sub>2</sub> eq	2.85E+2	1.31E+1	8.12E-2	2.71E+2	3.06E-1
Climate change – biogenic	kg CO <sub>2</sub> eq	2.44E+0	4.22E-2	2.20E-4	2.40E+0	1.38E-4
Climate Change, land use and land use change	kg CO <sub>2</sub> eq	3.90E-2	9.45E-3	7.58E-4	2.96E-2	7.85E-6
Ecotoxicity, freshwater – total	CTUe	1.68E+3	9.79E+1	7.99E-1	1.58E+3	1.47E-1
Eutrophication, freshwater	kg P eq	1.09E-3	7.68E-5	2.99E-7	1.02E-3	7.48E-7
Eutrophication, marine	kg N eq	1.49E-1	9.97E-3	3.56E-5	1.38E-1	5.05E-5
Eutrophication, terrestrial	Mole of N eq	1.55E+0	1.07E-1	4.29E-4	1.45E+0	6.03E-4
Human toxicity, cancer – total	CTUh	8.81E-8	4.31E-9	1.62E-11	8.38E-8	9.94E-12
Human toxicity, non-cancer – total	CTUh	1.53E-6	1.97E-7	7.21E-10	1.34E-6	4.45E-10
Ionising radiation, human health	kBq U235 eq	1.52E+2	1.45E+0	3.12E-4	1.50E+2	7.41E-3
Land Use	dimensionless (pt)	2.29E+3	4.72E+1	4.66E-1	2.24E+3	1.28E-1
Ozone depletion	kg CFC-11 eq	1.22E-8	7.21E-9	1.07E-14	5.01E-9	2.66E-13
Particulate matter	Disease incidences	5.71E-6	8.49E-7	7.69E-10	4.86E-6	8.08E-10
Photochemical ozone formation, human health	kg NMVOC eq	4.00E-1	3.10E-2	9.06E-5	3.69E-1	1.34E-4
Resource use, fossils	MJ	5.89E+3	1.93E+2	1.12E+0	5.69E+3	3.90E-1
Resource use, mineral and metals	kg Sb eq	1.15E-3	1.10E-3	5.43E-9	4.19E-5	2.24E-9
Water use	m <sup>3</sup> water eq deprived water	6.29E+1	3.25E+0	9.89E-4	5.96E+1	3.03E-2

# Climate change

This chart shows the overall impact of the product on climate change – total. The operations phase is the lifecycle phase with the biggest overall impact. Different operating conditions can lead to deviations from the reference scenario. The distribution stage of the reference product is not shown in the chart due to its relatively small contribution to climate change and its impact is included in the operation bar.

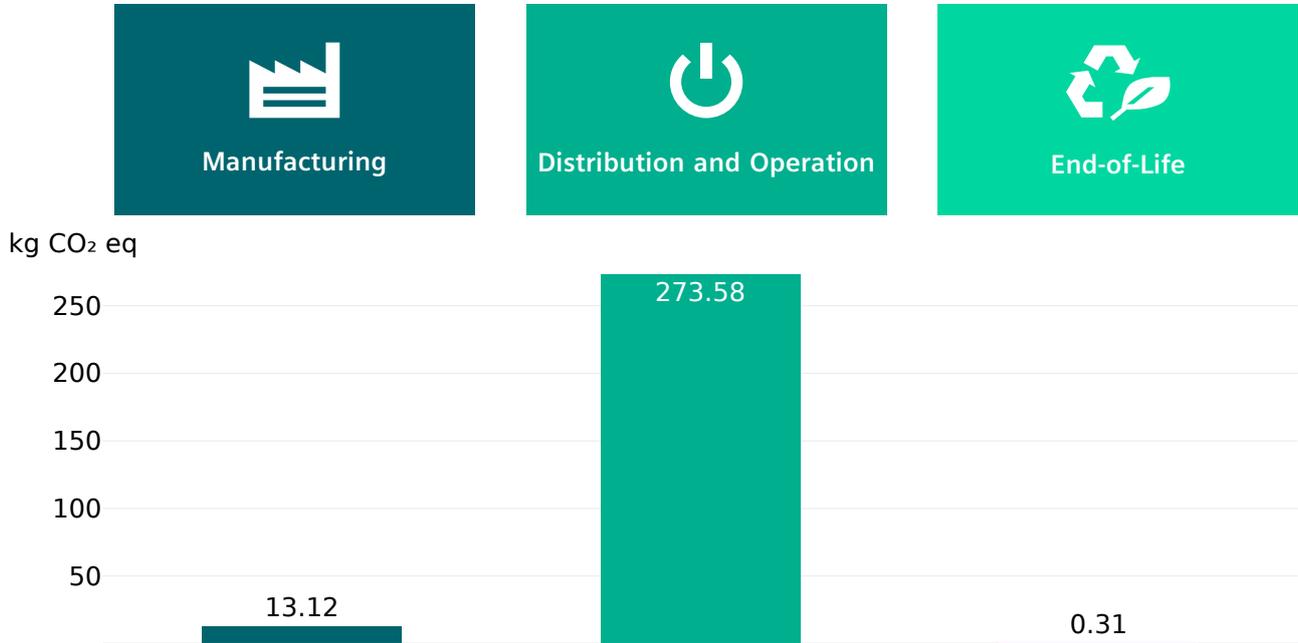

## End-of-life results

The end-of-life stage was modelled by shredding of the device, followed by sorting and material separation process.



It leads to:

- an overall **product recyclability of up to 14%** mainly due to high metal content
- an **energy recoverability of up to 59%** from plastic materials
- a **minimum disposal rate of 28%**

The exact final values depend on the used recycling process and add up to 100%.

**Note:** The device should not be disposed of as unsorted municipal waste. Special treatment for specific components may be mandated by law or recommended for environmental reasons. Observe all local and applicable laws.

# Appendix

For other racks „Key environmental performance indicators“ please refer the following factors:

Product	Description	Manufacturing	Distribution	Operation	End-of-Life
6EP4437-7EB00-3CX0	SITOP SEL1400 4 x 24V/10A	1	1	1	1
6EP1961-2BA11	SITOP PSE200U 3A Selektivitätsmodul	0,667	0,667	0,900	0,667
6EP1961-2BA21	SITOP PSE200U 10A Selektivitätsmodul	0,667	0,667	1	0,667
6EP1961-2BA31	SITOP PSE200U 3A Select Meldeschnittstelle	0,667	0,667	0,900	0,667
6EP1961-2BA41	SITOP PSE200U 10A Meldeschnittstelle	0,667	0,667	1	0,667
6EP1961-2BA51	SITOP PSE200U 3A Class 2 Selektivitätsmodul	0,667	0,667	0,900	0,667
6EP1961-2BA61	SITOP PSE200U 3A Class 2 MSS Selektivitätsmodul	0,567	0,567	0,900	0,567
6EP4240-7HB00-0AX0	SITOP PBM1200	1,333	1,333	0,100	1,333
6EP4346-7RB00-0AX0	SITOP RED1200 2x10A	1,567	1,567	1,200	1,567
6EP4347-7RB00-0AX0	SITOP RED1200 2x20A	1,700	1,700	2,500	1,700
6EP4347-7RC00-0AX0	SITOP RED1200 2x20A Ex	1,700	1,700	2,500	1,700
6EP4348-7RB00-0AX0	SITOP RED1200 2x40A	3,367	3,367	4,600	3,367
6EP4436-8XB00-0CY0	SITOP CNX8600 4 x 5A	3,833	3,833	1,500	3,833
6EP4436-8XB00-0DY0	SITOP CNX8600 8 x 2,5A	4,300	4,300	1,500	4,300
6EP4437-7EB00-3DX0	SITOP SEL1400 8 x 24V/5A	1	1	1	1
6EP4437-7FB00-3CX0	SITOP SEL1200 4 x 24V/10A	1	1	1	1
6EP4437-7FB00-3DX0	SITOP SEL1200 8 x 24V/5A	1	1	1	1
6EP4437-8XB00-0CY0	SITOP CNX8600 4 x 10A	3,833	3,833	3	3,833
6EP4438-7EB00-3DX0	SITOP SEL1400 8 x 24V/10A	1	1	1,800	1
6EP4438-7EC00-3DX0	SITOP SEL1400 8x24V/10A Ex	1	1	1,800	1
6EP4438-7FB00-3DX0	SITOP SEL1200 8 x 24V/10A	1	1	1,800	1
6EP4438-7FC00-3DX0	SITOP SEL1200 8x24V/10A Ex	1	1	1,800	1
6EP4448-7FB00-3CX0	SITOP SEL1200 4 x 48V/10A	1	1	1	1
6EP4548-7XB00-3AX0	SITOP CHO1400	2,907	2,907	0,100	2,907

# Legal Disclaimer

This Environmental Product Declaration (EPD) is for information purposes only. It is based upon the standards mentioned above. This EPD does not warrant or guarantee the composition of a product or that the product will retain a particular composition for a particular period. Therefore, all warranties, representations, conditions, and all other terms of any kind whatsoever implied by statute or common law are – to the fullest extent permitted by applicable law – excluded.

**Siemens therefore does not assume any liability for any error or for any consequence which may arise from the use of this information to the maximum extent under the law.**

Please be aware that the data of this EPD cannot be compared with data calculated based upon product category rules (PCRs) other than the standards mentioned above. The values given are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

**Published by Siemens AG**

Digital Industries

Process Automation

Östliche Rheinbrückenstr. 50

76187 Karlsruhe

Deutschland

Subject to changes and errors.

The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. In particular no assurance is given that those descriptions and performance features stand under warranty or guarantee in sense of any liability for any error or for any consequence which may arise from the use of this information to the maximum extent under the law. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or product names of Siemens AG or other companies whose use by third parties for their own purposes could violate the rights of the owners.

© 2024 by Siemens AG, Berlin and Munich