


SKS IS DIN 46231

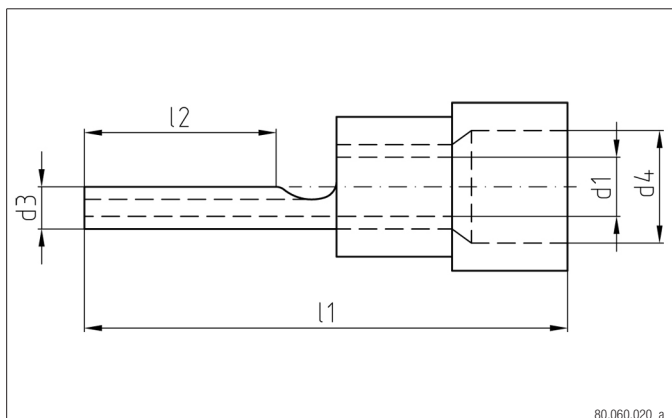

MAT

Kupfer, galvanisch verzinkt

RoHS

Stiftkabelschuh isoliert SKS IS DIN 46231

Mit aufgeweiteter Isolierhülse. Werkstoff Cu-HCP (0.1 – 0.5 mm²) bzw. Cu-ETP (ab 35 mm²), Isolation PC (bzw. * PA). Oberfläche galvanisch verzinkt.

mm ²	d ₁ mm	d ₄ mm	d ₃ mm	l ₁ mm	l ₂ mm	KG/100			Plica-Nr.	E-Nr.	VE
0.1 – 0.5	1.0	2.2	1.2	18.0	9.0	0.03	100	verzinkt	* 61.4400.000		100
0.5 – 1.0	1.7	4.0	1.9	22.8	11.0	0.07	100	verzinkt	61.4400.060	156 377 309	100
1.5 – 2.5	2.3	4.5	1.9	22.8	11.0	0.08	100	verzinkt	61.4400.420	156 377 509	100
4 – 6	3.6	6.4	2.8	27.0	11.0	0.16	100	verzinkt	61.4400.610	156 377 809	100
10	4.5	7.8	2.4 x 4.3	34.0	12.0	0.25	50	verzinkt	* 61.4400.070		50
16	5.8	9.1	2.5 x 5.6	40.7	13.5	0.43	50	verzinkt	* 61.4400.350		50
25	7.0	12.4	2.5 x 6.9	44.0	16.0	0.69	50	verzinkt	* 61.4301.121		50
35	8.4	14.0	3.2 x 8.1	52.5	20.0	1.19	50	verzinkt	* 61.4301.122		50