

LIFESAFE PRO EXIT IP65 EX W NM/MT DA

Code article 0038830

SYLVANIA


LiFeSafe



LiFeSafe PRO EXIT IP65 EX W NM/MT DA is a DALI addressable LED surface bulkhead. Maintained or Non-Maintained, 3Hr emergency duration. 4 x ISO7010 Exit legends, Left, Right, Up and Down available as an accessory (0038832). Maximum viewing distance 21m. 0 to +35°C operating temperature range. 120lm output (No legend kit fitted), IK03, IP65, Class II electrical construction, 6-year warranty.

Atouts techniques

Dimensions (mm)

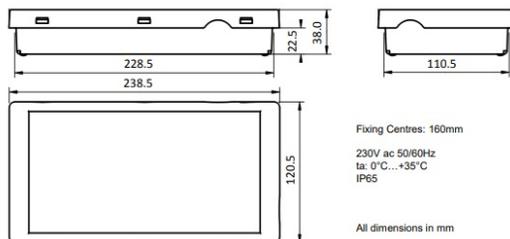

Photométrie

LIFESAFE PRO EXIT IP65 EX W NM/MT DA

Code article 0038830

SYLVANIA

Données générales

Nom du produit	LIFESAFE PRO EXIT IP65 EX W NM/MT DA
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Ceiling surface mounting, Wall surface mounted
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office
Operating temperature range (°C)	0°C...+35°C
ETIM Class	EC001957
Warranty	6 years

Données optiques

Fixture luminous flux (lm)	120
Luminaire efficacy (lm/W)	37.5
Température de couleur (K)	5700
IRC (Ra)	70
Photobiological Risk Group	RG1
Maintien du flux à la fin de la durée de vie nominale (lm)	70
Luminous flux (emergency) (lm)	120
Flux lumineux (d'urgence) (lm)	120
Emergency duration (h)	3

Caractéristiques électriques

Lampe incluse	Fixture without Lightsource
Actuel (A)	0.03
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.63
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	64.3
Electrical protection	Class II
Control gear required	Yes
Type d'appareillage	LED driver constant current
Drive current (mA)	275
Courant d'appel (A)	18.4
Inrush Duration (µs)	3
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	200
Max. products per 13A C Breaker	280
Max. products per 16A C Breaker	280
Max. products per 20A C Breaker	280
Max. products per 10A B Breaker	200
Max. products per 13A B Breaker	150
Max. products per 16A B Breaker	150
Max. products per 20A B Breaker	150
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	1.5

Durée de vie

Lifespan L70 B10	59000
Lifespan L90 B10	20000

LIFESAFE PRO EXIT IP65 EX W NM/MT DA

Code article 0038830

SYLVANIA

Données physiques

Housing colour	White
IP rating	IP65
IK rating	IK03
Longueur (mm)	239
Largeur (mm)	121
Nominal Product Height (mm)	38
Poids (kg)	0.71

Emballage

Product EAN number	5410288388304
Longueur simple de l'emballage (cm)	37.0
Largeur simple de l'emballage (cm)	31.0
Packaging single depth (cm)	19.0
DUN14 (inner)	05410288388304
Units per outer package	1
Packaging outer length / height (cm)	37.0
Packaging outer width (cm)	31.0
Packaging outer depth (cm)	19.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	0 °C-35
Utilisation pour applications sèches uniquement	No