

EMERGENCY PACK MANUAL TESTING 6V-55V

Artikelnummer 0046600

SYLVANIA


PRO



The standard, non- Auto test emergency kit enables conversion of general lighting for emergency operation and is a good solution for applications where self-testing is not required or suitable. It is used for driving luminaires with forward voltages (Vf) of 6V to 55V, and built-in adaptability that allows for optimum output current based on the forward voltage of the specific light engine for a more precise match to the controlled LED scheme. Features: 3W power consumption with approx 300 lumens, Suitable for independent mounting, Auto load detecting, Compatible with leading brands of mains drivers, SmartCharge technology for NiMH batteries, Battery deep discharge protection, Compatible with NiMH batteries, 3-hour rated emergency duration, SELV output. Supply current (max) 25mA. Ambient temperature (ta): 0°C to +35°C. Max case temperature (tc) +70°C. Conductor size : 0.2 to 1.5mm². NiMH battery. Product contains a charging regime that prolongs battery life and reduces parasitic power consumption during the product life cycle. By controlling battery temperature this results in energy saving and reduction in maintenance costs throughout the premises.

Technische Werte

Größe (mm)

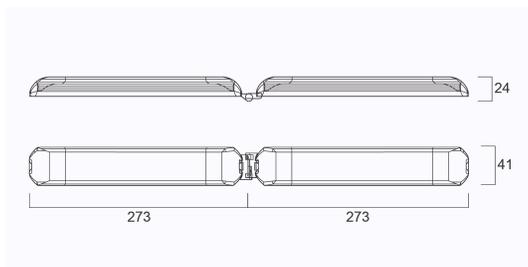

Photometrie

EMERGENCY PACK MANUAL TESTING 6V-55V

Artikelnummer 0046600

SYLVANIA

Allgemeine Daten

| | |
|-------------------------------|---|
| Produktname | EMERGENCY PACK MANUAL TESTING 6V- 55V |
| Technologie | Emergency Pack |
| Allgemeine Anwendungsbereiche | Education, Hospitality, Office, Retail |
| ETIM Klasse | EC000471 |
| Garantie | 3 Jahre |

Physikalische Daten

| | |
|--------------|------|
| Gewicht (kg) | 0.47 |
|--------------|------|

Packaging

| | |
|---|----------------|
| EAN Code | 5410288466002 |
| Einzelverpackung Länge (cm) | 28.5 |
| Einzelverpackung Breite (cm) | 10.0 |
| Einzelverpackung Tiefe (cm) | 4.5 |
| DUN 14 (außen) | 05410288466002 |
| Units per inner package | 1 |
| Anzahl an Einheiten je Außenverpackung | 25 |
| Außenverpackung Länge (cm) | 46.0 |
| Außenverpackung Breite (cm) | 31.0 |
| Außenverpackung Tiefe (cm) | 30.0 |

Safety data

| | |
|-----------------------------|----|
| Nur für trockene Umgebungen | Ja |
|-----------------------------|----|