

# INTERRATA ADJUSTABLE L IP67 CLEAR 2000LM 830 MB

Code article 0049044

**SYLVANIA**


**PRO**<sup>TM</sup>



Round shaped in-ground luminaire with +/-30° adjustable light module, drive-over for pressure loads to 2000kg (20kN), comes with 2m 3x1mm<sup>2</sup> flying lead and recessing tube, aluminium housing with Stainless steel (SS316) decorative ring and clear glass diffuser, IP67, IK10, Class I, non-dimmable, 2000lm, 29W, 69lm/W, CRI80, 25° beam angle, 50000 hrs L70 B50 lumen maintenance, 260mm diameter, 265mm recessing tube height, 3.5kg weight.

## Atouts techniques

### Dimensions (mm)

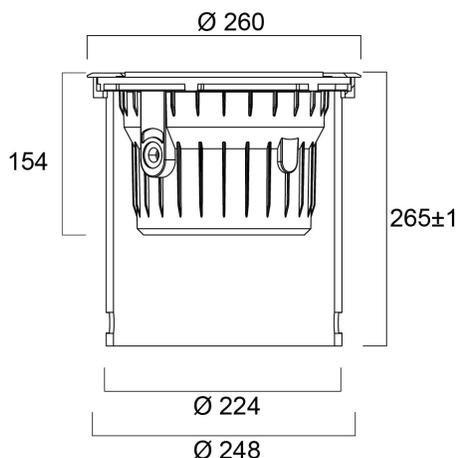


### Photométrie

Distance [m]	Cone diameter [m]	E107 E100	E100 E100	E100 E100
0.5	0.22 0.23	1000	1556	1554
1.0	0.45 0.46	500	778	777
1.5	0.67 0.69	333	519	518
2.0	0.89 0.92	250	377	376
2.5	1.12 1.16	200	300	299
3.0	1.34 1.37	167	250	249

Distance [m]    Cone diameter [m]    Illuminance [lx]

— C0 - C180 (Half beam angle: 25.3°)  
— C90 - C270 (Half beam angle: 25.2°)

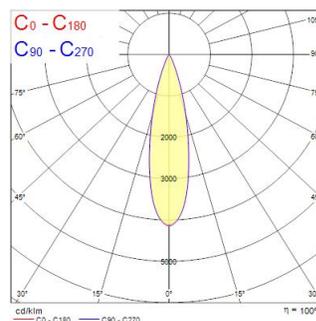

# INTERRATA ADJUSTABLE L IP67 CLEAR 2000LM 830 MB

Code article 0049044

**SYLVANIA**

## Données générales

Nom du produit	INTERRATA ADJUSTABLE L IP67 CLEAR 2000LM 830 MB
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ground recessed
General application	Hospitality, Museums & Galleries, Office, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000758
Numéro virtuel FI	4579507
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	2000
Luminaire efficacy (lm/W)	69
Température de couleur (K)	3000
Colour Code	830
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	25
Distribution type	Symmetric
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	29
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class I
Dimmable	No
Drive current (mA)	910
Courant d'appel (A)	15
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	G
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	25
Max. products per 13A C Breaker	33
Max. products per 16A C Breaker	40
Max. products per 20A C Breaker	50
Max. products per 10A B Breaker	15
Max. products per 13A B Breaker	20
Max. products per 16A B Breaker	24
Max. products per 20A B Breaker	30

## Durée de vie

Lifespan L70 B50	50000
------------------	-------

## Données physiques

Housing colour	Stainless steel
IP rating	IP67
IK rating	IK10
Diffuser material	Glass
Nominal Product Height (mm)	265
Nominal Product Diameter (mm)	260
Poids (kg)	3.5

# INTERRATA ADJUSTABLE L IP67 CLEAR 2000LM 830 MB

Code article 0049044

**SYLVANIA**

## Emballage

Product EAN number	5410288490441
Longueur simple de l'emballage (cm)	27.0
Largeur simple de l'emballage (cm)	27.0
Packaging single depth (cm)	27.0
DUN14 (inner)	15410288490448
Units per outer package	2
Packaging outer length / height (cm)	56.0
Packaging outer width (cm)	28.5
Packaging outer depth (cm)	28.5

## Sécurité

Condition de fonctionnement optimal (° C)	-20-40
---	--------