

# ToLEDo Mirage ST64 125LM E27 SL

Code article 0029905


**SYLVANIA**



A perfect choice for hospitality, decorative and mood lighting applications Unique and innovative lamp design and construction Low-lumen output to create the low-lit effect and gives no glare Low power construction: only 2.5W Perfect for SylPendant fixtures - a range of unique and elegant E27 lamp pendants, available in copper, brass, black and white finish Candlelight 2000K colour temperature creates a warm and cosy ambience High colour rendering – CRI80 High quality, scratch and temperature resistant golden tinted glass envelope 25,000 hours of average rated life. Last 25 times longer than incandescent lamps Omni-directional light distribution Non-dimmable More than 100,000X switching cycles 3 years warranty

## Atouts techniques

### Dimensions (mm)

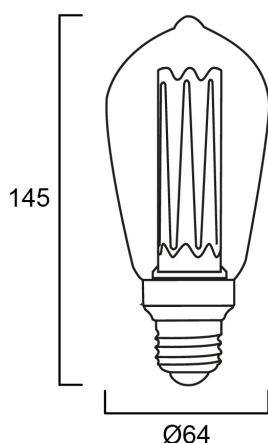

### Photométrie

# ToLEDo Mirage ST64 125LM E27 SL

Code article 0029905

**SYLVANIA**

## Données générales

|                                         |                                 |
|-----------------------------------------|---------------------------------|
| Nom du produit                          | ToLEDo Mirage ST64 125LM E27 SL |
| Technologie                             | LED                             |
| Puissance (nominale) (W)                | 2.5                             |
| Cap/Base                                | E27                             |
| Fixture rating                          | Open                            |
| General application                     | Residential & Consumer          |
| Operating temperature range (°C)        | -20°C...+40°C                   |
| Performance ambient temperature Tq (°C) | 25                              |
| ETIM Class                              | EC001959                        |
| Numéro virtuel FI                       | 4740635                         |
| Warranty                                | 3 ans                           |

## Données optiques

|                                                            |             |
|------------------------------------------------------------|-------------|
| Useful luminous flux (Φuse)                                | 125         |
| Flux lumineux utile (nominal) (lm)                         | 125         |
| Température de couleur (K)                                 | 2000        |
| Couleur de lumière                                         | Candlelight |
| IRC (Ra)                                                   | 80          |
| Colour Variation Initial (SDCM)                            | SDCM6       |
| Photobiological Risk Group                                 | RG0         |
| Maintien du flux à la fin de la durée de vie nominale (lm) | 70          |

## Caractéristiques électriques

|                                                                   |         |
|-------------------------------------------------------------------|---------|
| Power consumption (W)                                             | 2.5     |
| Wattage (W)                                                       | 2.5     |
| Equivalent watt (W)                                               | 13      |
| Heure de démarrage (max) (s)                                      | 0.5     |
| Temps de préchauffage jusqu'à 60 % de la pleine lumière (max) (s) | 1       |
| Primary Supply/Product voltage - min (V)                          | 220     |
| Primary Supply/Product voltage - max (V)                          | 240     |
| Lamp power factor                                                 | 1       |
| Control gear required                                             | No      |
| No. Of switching cycles before premature failures                 | >100000 |
| Dimmable                                                          | No      |
| Courant d'appel (A)                                               | 0.2     |
| Inrush Duration (μs)                                              | 8000    |
| Lamp Energy Label (class)                                         | G       |
| Nominal Frequency (Hz)                                            | 50/60Hz |

## Durée de vie

|                                     |       |
|-------------------------------------|-------|
| Lifespan L70 B50                    | 25000 |
| Average life (Nominal) (h)          | 25000 |
| Durée de vie moyenne (nominale) (h) | 25000 |

## Données physiques

|                               |       |
|-------------------------------|-------|
| Longueur (mm)                 | 142   |
| Nominal Product Diameter (mm) | 64    |
| Poids (kg)                    | 0.081 |

# ToLEDo Mirage ST64 125LM E27 SL

Code article 0029905

**SYLVANIA**

## Emballage

|                                      |                |
|--------------------------------------|----------------|
| Product EAN number                   | 5410288299051  |
| Longueur simple de l'emballage (cm)  | 16.1           |
| Largeur simple de l'emballage (cm)   | 7.1            |
| Packaging single depth (cm)          | 7.1            |
| DUN14 (inner)                        | 15410288299058 |
| Units per outer package              | 6              |
| Packaging outer length / height (cm) | 23.0           |
| Packaging outer width (cm)           | 15.5           |
| Packaging outer depth (cm)           | 18.5           |

## Sécurité

|                                                 |                                            |
|-------------------------------------------------|--------------------------------------------|
| Condition de fonctionnement optimal (° C)       | -20-40                                     |
| Consignes de nettoyage en cas de bris           | Not applicable                             |
| Lampe à objectif spécial                        | No                                         |
| Utilisation pour applications sèches uniquement | Yes                                        |
| Ne convient pas à l'éclairage résidentiel       | Yes                                        |
| Safety message                                  | Not Suitable for totally enclosed fixtures |