



## Arteor™ Lighting control axial switches

Cat. No(s): 0 770 03/06/09/13/16/19/36/39/46/49/81/82/83/84  
 5 725 07/23/24/25/26/27/28/29/83/84/85/86/88/89

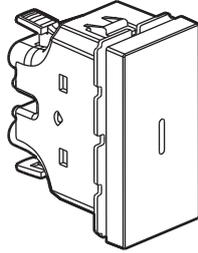

0 770 03/06/09/36/39/81/83  
 5 725 23/24/25/26/84/85/86

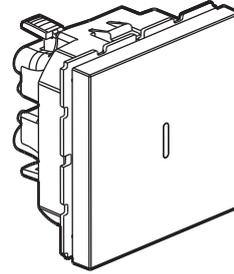

0 770 13/16/19/46/49/82/84  
 5 725 07/27/28/29/83/88/89


### 1. USE

Lighting control mechanisms.  
 Flush-mounting or surface-mounting.  
 Fixing with clips.

### 2. RANGE

	White	Magnesium
One-way axial switch - one module	0 770 03	5 725 23
One-way axial switch - two modules	0 770 13	5 725 27
Two-way axial switch - one module	0 770 06	5 725 24
Two-way axial switch - two modules	0 770 16	5 725 28
Changeover push-button - one module	0 770 36	5 725 84
Changeover push-button - two modules	0 770 46	5 725 07
Illuminated two-way switch - one module	0 770 09	5 725 26
Two-way switch with indicator - one module	0 770 81	5 725 25
Illuminated changeover push-button - one module	0 770 39	5 725 86
Changeover push-button with indicator - one module	0 770 83	5 725 85
Illuminated two-way switch - two modules	0 770 19	5 725 83
Two-way switch with indicator - two modules	0 770 82	5 725 29
Illuminated changeover push-button - two modules	0 770 49	5 725 89
Changeover push-button with indicator - two modules	0 770 84	5 725 88

### 3. OVERALL DIMENSIONS (mm)

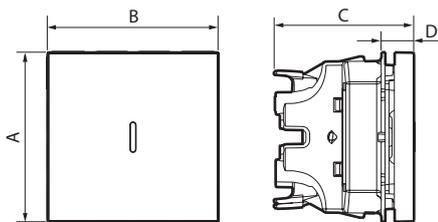

	A	B	C	D
0 770 03/06/09/36/39/81/83 5 725 23/24/25/26/84/85/86	45	22.5	37	8.6
0 770 13/16/19/46/49/82/84 5 725 07/27/28/29/83/88/89	45	45	37	8.6

### 4. CONNECTION

Type of terminals: automatic  
 Stripping length: 12 mm  
 Compatible with flexible or rigid cables

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20  
 Protection against impact: IK 01

#### ■ 5.2 Material characteristics

Material: mechanism housing: PC  
 Halogen free.  
 UV resistant.

#### Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.  
 + 650° C / 30 s for other parts made of insulating materials.

#### ■ 5.3 Electrical characteristics

Voltage: 250 V~

Current: 10 AX for 0 770 03/06/09/13/16/19/81/82  
 and 5 725 23/24/25/26/27/28/29/83

Current: 6 A for 0 770 36/39/46/49/83/84 and 5 725 07/84/85/86/88/89

Frequency: 50/60 Hz

#### ■ 5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C

Use temperature: - 5° C to + 35° C

### 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products:

Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia,  
 Bleach diluted to 10%, Window-cleaning products.

**Caution:** A preliminary test should be carried out if other specific  
 cleaning products are to be used.

### 7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.  
 Refer to e.catalogue.