

ToLEDo Lynx DE 1100LM G24Q 840 SL

Code article 0030225


SYLVANIA



LED replacement for compact fluorescent Lynx-DE lamps. 30,000 hours average rated life (L70 F50). 3 years warranty. Quick, simple and safe replacement without rewiring. Direct retrofit – easiest way to upgrade existing luminaires to LED technology. Suitable for electronic ballast/ECG operation. Low energy consumption and no flickering. Compact and durable construction. Minimum and maximum operating temperature: -20°C to 45°C. Ideal for commercial and residential applications including offices, hotels, restaurants, warehouses, supermarkets, corridors, in addition to living rooms, kitchens and garages. Warning: ToLEDo Lynx DE lamps are not suitable for magnetic ballast/CCG and direct mains 220-240V AC operation.

Atouts techniques

Dimensions (mm)

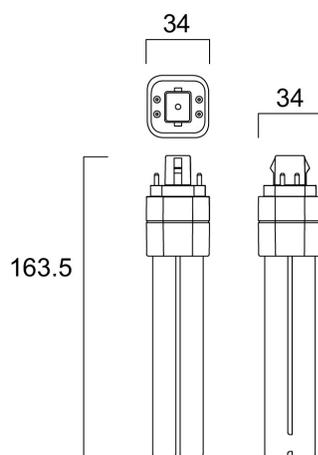

Photométrie

ToLEDo Lynx DE 1100LM G24Q 840 SL

Code article 0030225

SYLVANIA

Données générales

Nom du produit	ToLEDo Lynx DE 1100LM G24Q 840 SL
Technologie	LED
Lamp shape	U shape
Cap/Base	G24q-3
Lamp finish	Opal
General application	Hospitality, Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-20°C...+45°C
Virtual assistant compatibility	N/A
ETIM Class	EC001959
Numéro virtuel FI	4941330
Warranty	3 ans

Données optiques

Useful luminous flux (Φuse)	1100
Température de couleur (K)	4000
Couleur de lumière	Cool White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	280
Photobiological Risk Group	RG0

Caractéristiques électriques

Power consumption (W)	10
Wattage (W)	10
Equivalent watt (W)	26
Primary Supply/Product voltage - min (V)	20.0
Primary Supply/Product voltage - max (V)	40.0
Control gear required	Yes
Dimmable	No
Courant d'appel (A)	10
Inrush Duration (µs)	800
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz

Durée de vie

Lifespan L70 B50	30000
------------------	-------

Données physiques

IP rating	IP20
Longueur (mm)	170
Largeur (mm)	34
Nominal Product Height (mm)	34
Poids (kg)	0.072

Emballage

Product EAN number	5410288302256
Longueur simple de l'emballage (cm)	4.6
Largeur simple de l'emballage (cm)	3.8
Packaging single depth (cm)	17.7
DUN14 (inner)	15410288302253
Units per outer package	6
Packaging outer length / height (cm)	15.0
Packaging outer width (cm)	8.6
Packaging outer depth (cm)	22.0

Sécurité

Condition de fonctionnement optimal (° C)	-20-45
Consignes de nettoyage en cas de bris	Not applicable
Lampe à objectif spécial	No
Utilisation pour applications sèches uniquement	No
Ne convient pas à l'éclairage résidentiel	Yes
Safety message	Not suitable for household