


# START Track Spot L DALI 3250lm 930 WB White

Code article 0004928


**SYLVANIA**

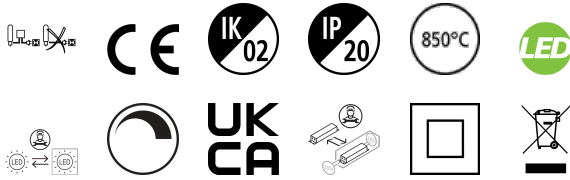

Spotlight for track mounting, decorative heat sink, white (RAL 9016) housing, equipped with Global GAC69 Pulse Adaptor, 3260 Lm, 36 W, 91 Lm/W, 3000 K, drive current: 900 mA, CRI 90, 52° beam angle, DALI dimmable, IP20, IK02, 50000 hrs, (H x W) 240 x 164 mm.

## Atouts techniques


### Dimensions (mm)

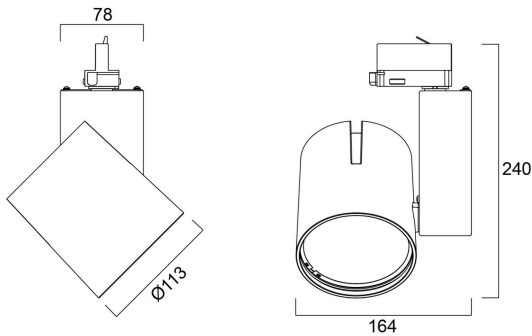

### Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.48	Ø0.71	16214
		Ø1.00	5960
1.0	0.96	Ø1.41	4079
		Ø2.00	1490
1.5	1.44	Ø2.13	1813
		Ø2.83	860
2.0	1.93	Ø2.83	1020
		Ø3.73	579
2.5	2.41	Ø3.73	693
		Ø4.83	340
3.0	2.89	Ø4.83	483
		Ø6.13	198

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 51.4°)

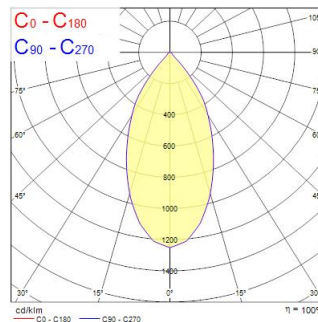

# START Track Spot L DALI 3250lm 930 WB White

Code article 0004928

**SYLVANIA**

## Données générales

Nom du produit	START Track Spot L DALI 3250lm 930 WB White
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Track mounting
Fixture rating	Enclosed
General application	Retail
Operating temperature range (°C)	1°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Numéro virtuel SE	7426201
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	3260
Luminaire efficacy (lm/W)	91
LOR (%)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	52
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	36
Actuel (A)	0.15
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
Electrical protection	Class II
Control gear required	Yes
Type d'appareillage	Electronic ballast
Montage de l'appareillage	Integral
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	900
Courant d'appel (A)	20
Inrush Duration (µs)	50
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	33
Max. products per 16A C Breaker	55
Max. products per 10A B Breaker	33
Max. products per 16A B Breaker	55

## Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	100000
Lifespan L80 B20	100000
Lifespan L80 B10	79500
Lifespan L90 B50	69500
Lifespan L90 B20	54500
Lifespan L90 B10	47500

# START Track Spot L DALI 3250lm 930 WB White

Code article 0004928

**SYLVANIA**

## Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Finition réflecteur	High-gloss
Largeur (mm)	164
Nominal Product Height (mm)	240
Poids (kg)	1.368

## Emballage

Product EAN number	5410288049281
Longueur simple de l'emballage (cm)	25.0
Largeur simple de l'emballage (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (inner)	05410288049281
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0

## Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	1-25
Utilisation pour applications sèches uniquement	Yes