
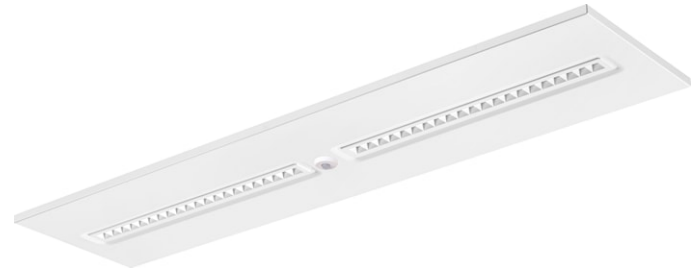


OPTICLIP 1200 4000K C8 WH SSA03 WHITE

Code article 0044046

SYLVANIA


PROTM

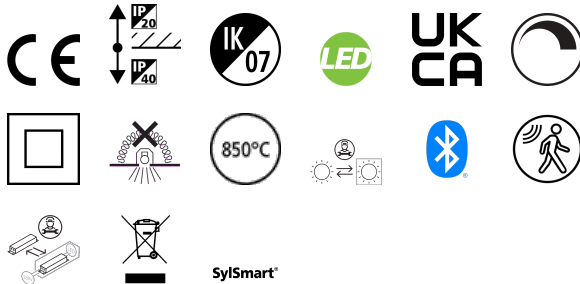

OPTICLIP 1200 4000K C8 WH SSA03 WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 1195x295x52mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, SylSmart Connected capable, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 3100lm luminous flux, 25W power consumption, 124lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 2000 cd/m², lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.

Atouts techniques

Dimensions (mm)

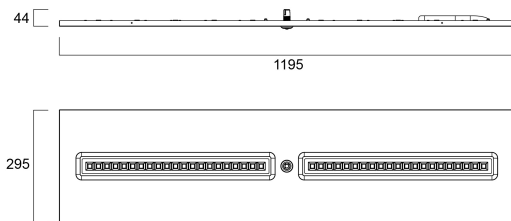


Photométrie

Distance [m]	Cone diameter [m]	E171 E170	E171 E170	E171 E170	7183 1590
0.5	0.85 0.93	E171 E170	40.3° 39.8°	1791 1560	1560
1.0	1.70 1.65	E171 E170	40.3° 39.8°	895 411	411
1.5	2.54 2.48	E171 E170	40.3° 39.8°	597 151	151
2.0	3.39 3.31	E171 E170	40.3° 39.8°	448 89	89
2.5	4.24 4.14	E171 E170	40.3° 39.8°	357 64	64
3.0	5.09 4.96	E171 E170	40.3° 39.8°	287 44	44

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 75.0°)
— C90 - C270 (Half beam angle: 80.0°)



OPTICLIP 1200 4000K C8 WH SSA03 WHITE

Code article 0044046

SYLVANIA

Données générales

Nom du produit	OPTICLIP 1200 4000K C8 WH SSA03 WHITE
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling recessed mounting
Built in presence detector	PIR
Fixture rating	Enclosed
General application	Education, Office
Operating temperature range (°C)	-20°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	124
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Luminous Intensity (cd)	1791
Beam Angle (°)	78
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	25
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Connected (SSA)
Minimum dimming level (%)	1
Drive current (mA)	650
Courant d'appel (A)	30
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	E, E(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	27
Max. products per 16A C Breaker	33
Max. products per 20A C Breaker	42
Max. products per 10A B Breaker	12
Max. products per 13A B Breaker	16
Max. products per 16A B Breaker	20
Max. products per 20A B Breaker	25
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	2.5

OPTICLIP 1200 4000K C8 WH SSA03 WHITE

Code article 0044046

SYLVANIA

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	62500

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Longueur (mm)	1195
Largeur (mm)	295
Nominal Product Height (mm)	52
Poids (kg)	3.05

Emballage

Product EAN number	5410288440460
Longueur simple de l'emballage (cm)	124.5
Largeur simple de l'emballage (cm)	6.5
Packaging single depth (cm)	32.0
DUN14 (inner)	05410288440460
Units per outer package	1
Packaging outer length / height (cm)	124.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	32.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-20-25