

LED PIPE L1200 HIGH OUTPUT WW

Code article 0051374


SYLVANIA




LED T5 replacement batten, high output range: more lumens per meter with efficiency up to 125 lum/watt, seamless linking (up to 10M), ideal for direct lighting such as under cabinet or in kitchens, 120 degree beam angle, includes switch, includes 0.30m stripped cable, white polycarbonate body, includes standard and tilting brackets

Atouts techniques

Dimensions (mm)

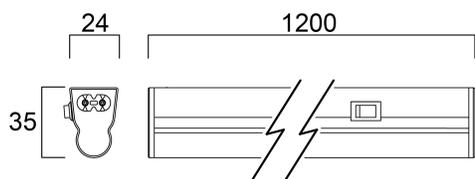

Photométrie

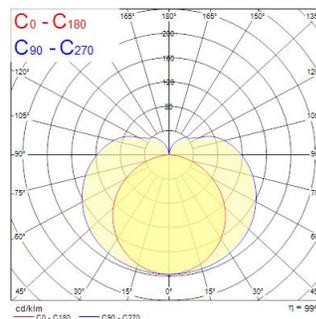

LED PIPE L1200 HIGH OUTPUT WW

Code article 0051374

SYLVANIA

Données générales

| | |
|---|--------------------------------|
| Nom du produit | LED PIPE L1200 HIGH OUTPUT WW |
| Technologie | LED |
| Cap/Base | N/A |
| Housing | PC Polycarbonate |
| Built in presence detector | NONE |
| General application | Residential & Consumer, Retail |
| Operating temperature range (°C) | -20°C...+40°C |
| Performance ambient temperature Tq (°C) | 25 |
| Virtual assistant compatibility | N/A |
| ETIM Class | EC000109 |
| Numéro virtuel FI | 4278219 |
| Warranty | 3 ans |

Données optiques

| | |
|----------------------------|------------|
| Fixture luminous flux (lm) | 1725 |
| Luminaire efficacy (lm/W) | 115 |
| Température de couleur (K) | 3000 |
| Couleur de lumière | Warm White |
| IRC (Ra) | 80 |
| Beam Angle (°) | 120 |
| Photobiological Risk Group | RG0 |

Caractéristiques électriques

| | |
|--|-----------------------------|
| Consommation électrique totale (W) | 15 |
| Primary Supply/Product voltage - min (V) | 220 |
| Primary Supply/Product voltage - max (V) | 240 |
| Lamp power factor | 0.7 |
| Electrical protection | Class II |
| Control gear required | No |
| Type d'appareillage | LED driver constant current |
| Dimmable | No |
| Dimming method | N/A |
| Drive current (mA) | 150 |
| Courant d'appel (A) | 100 |
| Inrush Duration (µs) | 150 |
| Energy Efficiency Class (A->G) of contained light source | C |
| Nominal Frequency (Hz) | 50/60Hz |
| Max. products per 10A C Breaker | 87 |
| Max. products per 13A C Breaker | 113 |
| Max. products per 16A C Breaker | 142 |
| Max. products per 20A C Breaker | 174 |
| Max. products per 10A B Breaker | 51 |
| Max. products per 13A B Breaker | 68 |
| Max. products per 16A B Breaker | 84 |
| Max. products per 20A B Breaker | 105 |
| Connectable conductor cross section - Max (mm ²) | 1.5 |

Durée de vie

Lifespan L70 B50 | 30000

LED PIPE L1200 HIGH OUTPUT WW

Code article 0051374

SYLVANIA

Données physiques

| | |
|-----------------------------|------------------|
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK03 |
| Diffuser material | PC Polycarbonate |
| Longueur (mm) | 1200 |
| Largeur (mm) | 24 |
| Nominal Product Height (mm) | 35 |
| Poids (kg) | 0.17 |

Emballage

| | |
|--------------------------------------|----------------|
| Product EAN number | 5410288513744 |
| Longueur simple de l'emballage (cm) | 120.4 |
| Largeur simple de l'emballage (cm) | 4.6 |
| Packaging single depth (cm) | 3.1 |
| DUN14 (inner) | 15410288513741 |
| Units per outer package | 24 |
| Packaging outer length / height (cm) | 122.0 |
| Packaging outer width (cm) | 20.5 |
| Packaging outer depth (cm) | 21.5 |

Sécurité

| | |
|---|--------|
| Glow Wire Test (°C) | 650 |
| Condition de fonctionnement optimal (° C) | -20-40 |