


OTAO LINEAR 1.2 PRIS 830/840 MP WH

Artikelnummer 0041802

SYLVANIA


PROTM

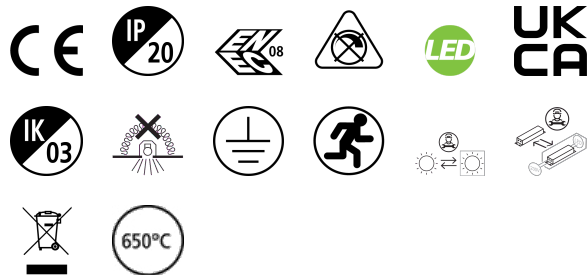


Linear LED Luminaire, RAL9003 (white) finishing, direct distribution, standard surface mounted version complete with end caps and surface brackets, additional mounting options with accessories, 50mm wide extruded aluminium profile, lenses with prismatic diffuser, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, power and CCT switch options at the back of the luminaire, colour temperature: 3000K/4000K CCT options, CRI (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), non-dimmable driver, 4-steps combined dip-switch for direct and D/I light distribution, 2-steps power dip switch in direct mode (22-24W), max system power: 24W, max fixture output: 3350lm @ 4000K CCT, efficacy at max output 140lm/W, additional 2-steps power dip switch when indirect module added (34-36W), max system power in D/I combination: 36W, max fixture output: 4850lm @ 4000K CCT, efficacy at max output 135lm/W, electrical protection: Class I, IP20 ingress protection, IK03 impact resistance level, suitable for indoor environment only, lifespan: 100,000 hours L80B50, operating voltage: 220-240V / 50-60Hz, nominal size: 1147x50x73mm, shipped with through wiring.

Technische Werte

Größe (mm)

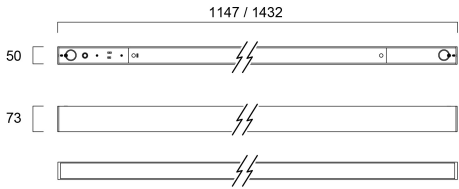

Photometrie



OTAO LINEAR 1.2 PRIS 830/840 MP WH

Artikelnummer 0041802

SYLVANIA

Lifetime data

Lebensdauer - L70B50	100000
Lebensdauer - L80B50	100000
Lebensdauer - L90B50	48000

Physikalische Daten

Gehäusefarbe	RAL 9003 - Signal white
IP Schutzart	IP20
IK Schutzart	IK03
Diffusor	Transparent
Diffusormaterial	PC Polycarbonate
Länge (mm)	1147
Breite (mm)	50
Nominale Produkthöhe (mm)	73
Gewicht (kg)	1.75

Packaging

EAN Code	5410288418025
Einzelverpackung Länge (cm)	122.0
Einzelverpackung Breite (cm)	6.1
Einzelverpackung Tiefe (cm)	7.8
DUN 14 (außen)	15410288418022
Anzahl an Einheiten je Außenverpackung	4
Außenverpackung Länge (cm)	124.0
Außenverpackung Breite (cm)	14.2
Außenverpackung Tiefe (cm)	19.4

Safety data

Glühdrahttest (°C)	650
Optimale Betriebstemperatur (°C)	5-50