

ToLEDo GLS V9 1920LM 840 E27 SL

Code article 0030042


SYLVANIA



Compact and elegant design. Suitable replacement for halogen, incandescent and compact fluorescent lamps Instant light at the flick of a switch. Uniform light distribution. Good colour rendering (CRI 80). Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas. Lower maintenance costs. 15,000 hours average rated life

Atouts techniques

Dimensions (mm)

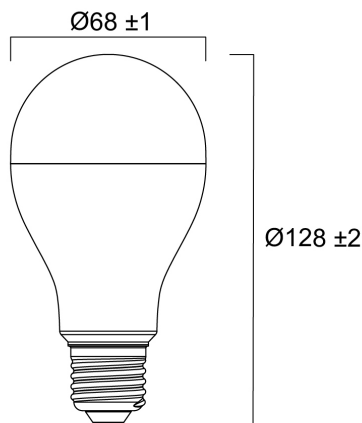

Photométrie

ToLEDo GLS V9 1920LM 840 E27 SL

Code article 0030042

SYLVANIA

Données générales

Nom du produit	ToLEDo GLS V9 1920LM 840 E27 SL
Technologie	LED
Lamp shape	Pear-shape
Cap/Base	E27
Lamp finish	Opal
Fixture rating	Open
General application	Education, Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001959
Numéro virtuel FI	4741185
Warranty	3 ans

Données optiques

Useful luminous flux (Φ_{use})	1920
Température de couleur (K)	4000
Couleur de lumière	Cool White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	150
Photobiological Risk Group	RG0

Caractéristiques électriques

Power consumption (W)	16
Wattage (W)	16
Equivalent watt (W)	120
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Drive current (mA)	130
Courant d'appel (A)	7
Inrush Duration (μ s)	420
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz

Durée de vie

Lifespan L70 B50	15000
Durée de vie moyenne (nominale) (h)	15000

Données physiques

Housing colour	White
IP rating	IP20
Nominal Product Height (mm)	128
Nominal Product Diameter (mm)	68
Poids (kg)	0.069

ToLEDo GLS V9 1920LM 840 E27 SL

Code article 0030042

SYLVANIA

Emballage

Product EAN number	5410288300429
Longueur simple de l'emballage (cm)	6.9
Largeur simple de l'emballage (cm)	6.9
Packaging single depth (cm)	13.3
DUN14 (inner)	15410288300426
Units per outer package	6
Packaging outer length / height (cm)	21.5
Packaging outer width (cm)	14.5
Packaging outer depth (cm)	14.3

Sécurité

Condition de fonctionnement optimal (° C)	-20-40
Consignes de nettoyage en cas de bris	Not applicable
Lampe à objectif spécial	No
Utilisation pour applications sèches uniquement	Yes
Ne convient pas à l'éclairage résidentiel	Yes
Safety message	Not Suitable for totally enclosed fixtures