


Resisto 1500 HE IP66 DALI 4000LM 840 EM

Code article 0010282

SYLVANIA


PROTM

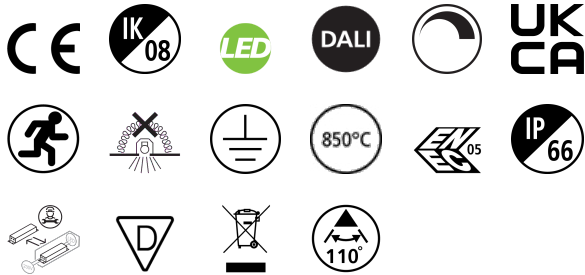

Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 4000lm; 29W; 138lm/W; 4000K; SDCM<3; DALI dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark; 3-hour maintained emergency batteries.


Atouts techniques

Dimensions (mm)

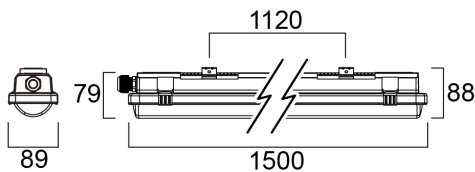

Photométrie

Distance (m)	Cone diameter (m)	Beam angle (°)	Illuminance (lx)
0.5	1.32 1.43	50° 52°	5145 589
1.0	2.63 2.86	50° 52°	1286 142
1.5	3.95 4.28	50° 52°	672 80
2.0	5.27 5.71	50° 52°	321 59
2.5	6.55 7.14	50° 52°	206 51
3.0	7.80 8.57	50° 52°	143 44



Resisto 1500 HE IP66 DALI 4000LM 840 EM

Code article 0010282

SYLVANIA

Données générales

Nom du produit	Resisto 1500 HE IP66 DALI 4000LM 840 EM
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Ceiling surface mounting, Suspended, Wall surface mounted
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	5°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	138
Température de couleur (K)	4000
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 23
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	785
Flux lumineux (d'urgence) (lm)	785
Emergency duration (h)	3

Caractéristiques électriques

Consommation électrique totale (W)	29
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	9
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	350
Courant d'appel (A)	22.4
Inrush Duration (µs)	176
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Max (mm²)	2.5

Resisto 1500 HE IP66 DALI 4000LM 840 EM

Code article 0010282

SYLVANIA

Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	74000
Lifespan L80 B20	69000
Lifespan L80 B10	66000
Lifespan L90 B50	35000
Lifespan L90 B20	33000
Lifespan L90 B10	31000

Données physiques

Housing colour	Grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Longueur (mm)	1500
Largeur (mm)	87
Nominal Product Height (mm)	80
Poids (kg)	2.66

Emballage

Product EAN number	5410288102825
Longueur simple de l'emballage (cm)	150.5
Largeur simple de l'emballage (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	05410288102825
Units per outer package	1
Packaging outer length / height (cm)	150.5
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	8.5

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	5-40