


Resisto 1500 HE IP66 7100lm 840 EM

Code article 0010272

SYLVANIA


PROTM

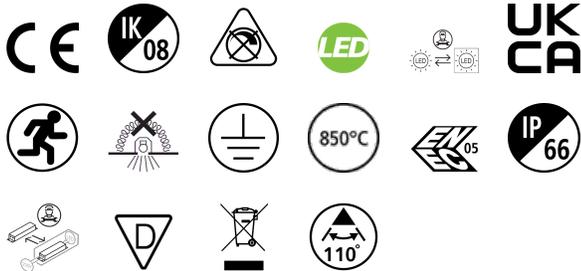

Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 7100lm; 50W; 142lm/W; 4000K; SDCM<3; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark; 3-hour maintained emergency batteries.

Atouts techniques


Dimensions (mm)

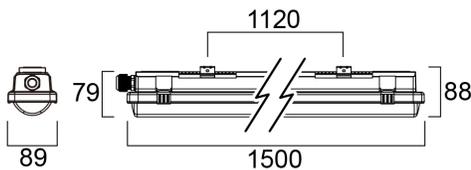

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Illuminance [lx]
0.5	1.25 1.35	51.4° 54.2°	9470 1152	9470 947
1.0	2.51 2.77	51.4° 54.2°	2368 288	2368 2368
1.5	3.76 4.16	51.4° 54.2°	1032 125	1032 1032
2.0	5.01 5.55	51.4° 54.2°	590 72	590 590
2.5	6.26 6.93	51.4° 54.2°	373 46	373 373
3.0	7.52 8.32	51.4° 54.2°	263 33	263 263

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 102.8°)
 — C90 - C270 (Half beam angle: 102.8°)

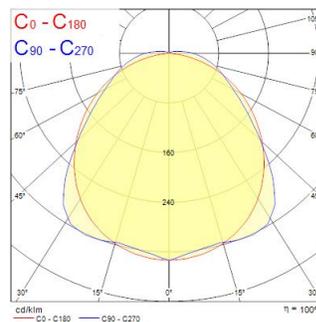

Resisto 1500 HE IP66 7100lm 840 EM

Code article 0010272

SYLVANIA

Données générales

Nom du produit	Resisto 1500 HE IP66 7100lm 840 EM
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Ceiling surface mounting, Suspended, Wall surface mounted
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	5°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	7100
Luminaire efficacy (lm/W)	142
Température de couleur (K)	4000
IRC (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 25
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	760
Flux lumineux (d'urgence) (lm)	760
Emergency duration (h)	3

Caractéristiques électriques

Consommation électrique totale (W)	50
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Type d'appareillage	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Courant d'appel (A)	15
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	30
Max. products per 13A C Breaker	39
Max. products per 16A C Breaker	48
Max. products per 20A C Breaker	60
Max. products per 10A B Breaker	30
Max. products per 13A B Breaker	39
Max. products per 16A B Breaker	48
Max. products per 20A B Breaker	60
Connectable conductor cross section - Max (mm ²)	2.5

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	69000
Lifespan L90 B10	31000

Resisto 1500 HE IP66 7100lm 840 EM

Code article 0010272

SYLVANIA

Données physiques

Housing colour	Grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Longueur (mm)	1500
Largeur (mm)	87
Nominal Product Height (mm)	80
Poids (kg)	2.58

Emballage

Product EAN number	5410288102726
Longueur simple de l'emballage (cm)	150.5
Largeur simple de l'emballage (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	05410288102726
Units per outer package	1
Packaging outer length / height (cm)	150.5
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	8.5

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	5-40