

# ToLEDo GLS V9 1920LM 865 E27 SL

Code article 0030043


**SYLVANIA**



Compact and elegant design. Suitable replacement for halogen, incandescent and compact fluorescent lamps Instant light at the flick of a switch. Uniform light distribution. Good colour rendering (CRI 80). Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas. Lower maintenance costs. 15,000 hours average rated life

## Atouts techniques

### Dimensions (mm)

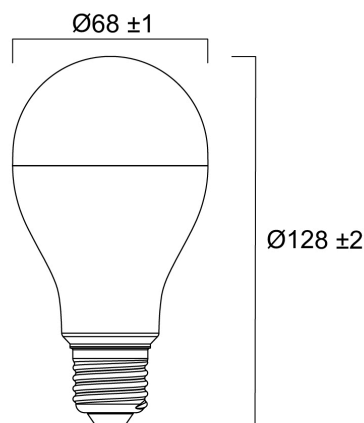

### Photométrie

# ToLEDo GLS V9 1920LM 865 E27 SL

Code article 0030043

**SYLVANIA**

## Données générales

|                                         |                                                |
|-----------------------------------------|------------------------------------------------|
| Nom du produit                          | ToLEDo GLS V9 1920LM 865 E27 SL                |
| Technologie                             | LED                                            |
| Lamp shape                              | Pear-shape                                     |
| Cap/Base                                | E27                                            |
| Lamp finish                             | Opal                                           |
| Fixture rating                          | Open                                           |
| General application                     | Education, Hospitality, Residential & Consumer |
| Operating temperature range (°C)        | -20°C...+40°C                                  |
| Performance ambient temperature Tq (°C) | 25                                             |
| Virtual assistant compatibility         | N/A                                            |
| ETIM Class                              | EC001959                                       |
| Numéro virtuel FI                       | 4741186                                        |
| Warranty                                | 3 ans                                          |

## Données optiques

|                                 |          |
|---------------------------------|----------|
| Useful luminous flux (Φuse)     | 1920     |
| Température de couleur (K)      | 6500     |
| Couleur de lumière              | Daylight |
| IRC (Ra)                        | 80       |
| Colour Variation Initial (SDCM) | SDCM6    |
| Beam Angle (°)                  | 150      |
| Photobiological Risk Group      | RG0      |

## Caractéristiques électriques

|                                                   |         |
|---------------------------------------------------|---------|
| Power consumption (W)                             | 16      |
| Wattage (W)                                       | 16      |
| Equivalent watt (W)                               | 120     |
| Primary Supply/Product voltage - min (V)          | 220     |
| Primary Supply/Product voltage - max (V)          | 240     |
| Control gear required                             | No      |
| No. Of switching cycles before premature failures | >50000  |
| Dimmable                                          | No      |
| Drive current (mA)                                | 130     |
| Courant d'appel (A)                               | 7       |
| Inrush Duration (µs)                              | 420     |
| Lamp Energy Label (class)                         | E       |
| Nominal Frequency (Hz)                            | 50/60Hz |

## Durée de vie

|                                     |       |
|-------------------------------------|-------|
| Lifespan L70 B50                    | 15000 |
| Durée de vie moyenne (nominale) (h) | 15000 |

## Données physiques

|                               |       |
|-------------------------------|-------|
| Housing colour                | White |
| IP rating                     | IP20  |
| Nominal Product Height (mm)   | 128   |
| Nominal Product Diameter (mm) | 68    |
| Poids (kg)                    | 0.069 |

# ToLEDo GLS V9 1920LM 865 E27 SL

Code article 0030043

**SYLVANIA**

## Emballage

|                                      |                |
|--------------------------------------|----------------|
| Product EAN number                   | 5410288300436  |
| Longueur simple de l'emballage (cm)  | 6.9            |
| Largeur simple de l'emballage (cm)   | 6.9            |
| Packaging single depth (cm)          | 13.3           |
| DUN14 (inner)                        | 15410288300433 |
| Units per outer package              | 6              |
| Packaging outer length / height (cm) | 21.5           |
| Packaging outer width (cm)           | 14.5           |
| Packaging outer depth (cm)           | 14.3           |

## Sécurité

|                                                 |                                            |
|-------------------------------------------------|--------------------------------------------|
| Condition de fonctionnement optimal (° C)       | -20-40                                     |
| Consignes de nettoyage en cas de bris           | Not applicable                             |
| Lampe à objectif spécial                        | No                                         |
| Utilisation pour applications sèches uniquement | Yes                                        |
| Ne convient pas à l'éclairage résidentiel       | Yes                                        |
| Safety message                                  | Not Suitable for totally enclosed fixtures |