




FG function combined wiring clamps

Feature

- Part numbers reduced through the integration of the plastic clamp and the metal FG component.
- Plastic and metal portions can be separated for disposal.
- Easily detachable cables allow improvement for maintenance.

Material

- Plastic portion / nylon 66 (Natural / UL94V-0)
- Metal portion / Phosphor bronze (Sn plating)

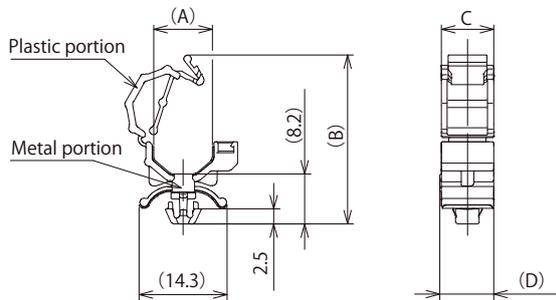

Installation specifications

- Board thickness : t0.8~1.6
- Hole diameter : $\phi 4.8^{+0.2}$

Unit: mm

Part No.	(A)	(B)	C	(D)	Applicable cable diameter
FGCS-5	7.0	23.3	5.5	5.7	$\phi 5.0 \sim \phi 5.5$
FGCS-8	9.5	27.5	8.5	8.7	$\phi 7.0 \sim \phi 8.5$