


Sylvania Granit IP65 0-10V 26400lm 840 MB

Code article 0039732

SYLVANIA


PROTM

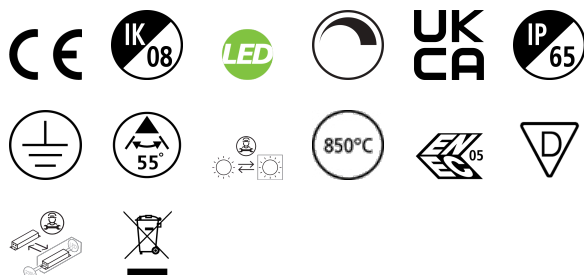

Integrated LED highbay; Black aluminium housing; 26400lm; 165 W; 160 Lm/W; 4000K; Drive current: 720mA; CRI 80; 55° beam angle; 0-10V dimmable; IP65; IK08; Lifespan L80:B20 92,000 hrs; (D x H) 370 x 163 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.

Atouts techniques


Dimensions (mm)

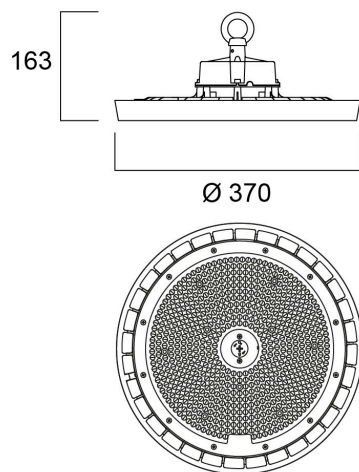

Photométrie

0.5	0.49	E(0°) 13489 E/C(0° - 26.2°) 4878
1.0	0.98	E(0°) 3362 E/C(0° - 26.2°) 1214
1.5	1.48	E(0°) 1461 E/C(0° - 26.2°) 515
2.0	1.97	E(0°) 843 E/C(0° - 26.2°) 308
2.5	2.46	E(0°) 592 E/C(0° - 26.2°) 199
3.0	2.95	E(0°) 376 E/C(0° - 26.2°) 134

Distance [m] Cone diameter [m]
C0 - C180 (half beam angle: 52.4°)
Illuminance [lx]



Sylvania Granit IP65 0-10V 26400lm 840 MB

Code article 0039732



Données générales

Nom du produit	Sylvania Granit IP65 0-10V 26400lm 840 MB
Technologie	LED
Cap/Base	N/A
General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+50°C
ETIM Class	EC001716
Numéro virtuel FI	4357098
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	26400
Luminaire efficacy (lm/W)	160
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	55
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	165
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
No. Of switching cycles before premature failures	>100000
Dimmable	Yes
Dimming method	0-10V
Drive current (mA)	720
Courant d'appel (A)	100
Inrush Duration (µs)	300
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	4
Max. products per 13A C Breaker	5
Max. products per 16A C Breaker	7
Max. products per 20A C Breaker	9
Max. products per 10A B Breaker	2
Max. products per 13A B Breaker	2
Max. products per 16A B Breaker	4
Max. products per 20A B Breaker	5
Mains surge immunity (differential mode -> L-N) (kV)	6
Mains surge immunity (common mode -> L/N - GND) (kV)	6

Durée de vie

Lifespan L70 B50	120000
Lifespan L80 B20	92000
Lifespan L90 B50	51000

Sylvania Granit IP65 0-10V 26400lm 840 MB

Code article 0039732



Données physiques

Housing colour	RAL 9017 - Traffic black
IP rating	IP65
IK rating	IK08
Nominal Product Height (mm)	163
Nominal Product Diameter (mm)	370
Poids (kg)	2.703

Emballage

Product EAN number	5410288397320
Longueur simple de l'emballage (cm)	40.0
Largeur simple de l'emballage (cm)	40.0
Packaging single depth (cm)	14.5
DUN14 (inner)	05410288397320
Units per outer package	1
Packaging outer length / height (cm)	40.0
Packaging outer width (cm)	40.0
Packaging outer depth (cm)	14.5

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-30-50