


Kalani IP66 39KLM 840 ASYM

Code article 0048543


SYLVANIA

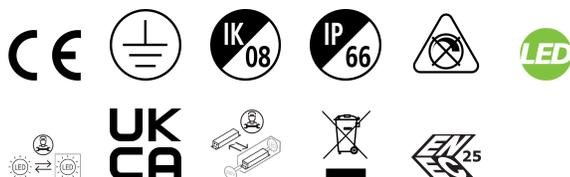


Exterior LED Floodlight, comes complete with 1500mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 4000K, Non-dimming, 40100lm, 300W, 134lm/W, CRI80, Asymmetrical Wide beam angle (65° x 120° imax@55°), 100000 hrs L80B20 lifespan, 567 x 465 x 97mm (LxWxD) dimensions, 9.6kg weight.

Atouts techniques

Dimensions (mm)

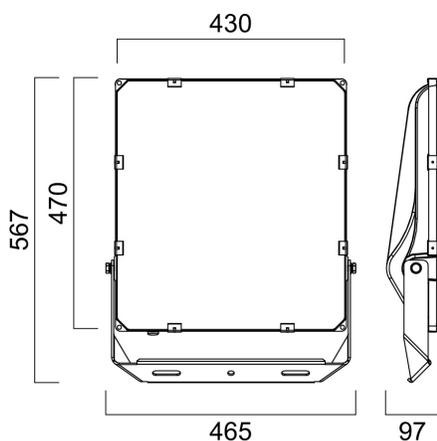

Photométrie



Kalani IP66 39KLM 840 ASYM

Code article 0048543

SYLVANIA

Données générales

Nom du produit	Kalani IP66 39KLM 840 ASYM
Technologie	LED
Cap/Base	N/A
General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Numéro virtuel FI	4579574
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	40100
Luminaire efficacy (lm/W)	134
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	65*120
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	300
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.97
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Drive current (mA)	5650
Courant d'appel (A)	80
Inrush Duration (µs)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	2
Max. products per 13A C Breaker	3
Max. products per 16A C Breaker	4
Max. products per 20A C Breaker	5
Max. products per 10A B Breaker	1
Max. products per 13A B Breaker	1
Max. products per 16A B Breaker	2
Max. products per 20A B Breaker	3
Mains surge immunity (differential mode -> L-N) (kV)	6
Mains surge immunity (common mode -> L/N - GND) (kV)	10

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	100000

Kalani IP66 39KLM 840 ASYM

Code article 0048543

SYLVANIA

Données physiques

IP rating	IP66
IK rating	IK08
Longueur (mm)	567
Largeur (mm)	465
Nominal Product Height (mm)	97
Poids (kg)	9.6

Emballage

Product EAN number	5410288485430
Longueur simple de l'emballage (cm)	66.0
Largeur simple de l'emballage (cm)	16.0
Packaging single depth (cm)	51.0
DUN14 (inner)	05410288485430
Units per outer package	1
Packaging outer length / height (cm)	66.0
Packaging outer width (cm)	16.0
Packaging outer depth (cm)	51.0

Sécurité

Condition de fonctionnement optimal (° C)	-30-50
---	--------