


# PIXO LINE 1500 90D Beam 830 Black

Artikelnummer 0007823

**SYLVANIA**


**PRO**<sup>TM</sup>

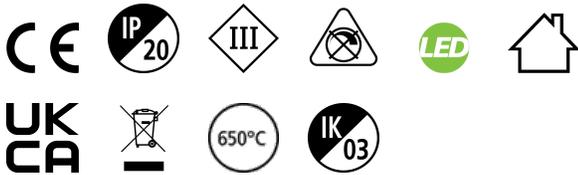

Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps, translucent optic diffuser, light beam angle: 90° Textured black finishing colour. Light color temperature: 3000K, warm white, max. system power: 50W Max. fixture lumen output: 7200lm, efficacy: 144lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx38.4mmx 37mm

## Technische Werte

### Größe (mm)

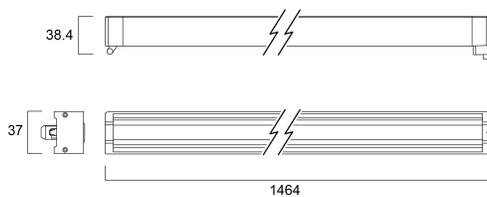

### Photometrie

Distance [m]	Core diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	1.01 1.38	1.01 1.38	8347 1402 527
1.0	2.01 2.77	2.01 2.77	2087 356 209
1.5	3.02 4.16	3.02 4.16	877 153 93
2.0	4.03 5.55	4.03 5.55	522 88 52
2.5	5.04 6.83	5.04 6.83	324 47 35
3.0	6.04 8.32	6.04 8.32	222 30 23

Distance [m]    Core diameter [m]    Illuminance [lx]  
 — C2 - C180 (Half beam angle: 108.4°)  
 — C50 - C270 (Half beam angle: 90.4°)



# PIXO LINE 1500 90D Beam 830 Black

Artikelnummer 0007823

**SYLVANIA**

## Physikalische Daten

Gehäusefarbe	Black
IP Schutzart	IP20
IK Schutzart	IK03
Länge (mm)	1464
Breite (mm)	37
Nominale Produkthöhe (mm)	38.4
Gewicht (kg)	0.9

## Packaging

EAN Code	5410288078236
Einzelverpackung Länge (cm)	147.0
Einzelverpackung Breite (cm)	4.3
Einzelverpackung Tiefe (cm)	4.3
DUN 14 (außen)	15410288078233
Anzahl an Einheiten je Außenverpackung	10
Außenverpackung Länge (cm)	149.0
Außenverpackung Breite (cm)	24.0
Außenverpackung Tiefe (cm)	11.0

## Safety data

Glühdrahttest (°C)	650
Optimale Betriebstemperatur (°C)	-20-40