



Features

- Logistics and Industry modular high bay luminaire with wide optics to provide homogenous light distribution for open space areas. Twin body with 6 optical modules, 47400 lumens, 327W, 145lm/W, 4000K, CRI 80, wide beam optic, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK08 (Sensor IK03), (LxWxH) 726x386x133mm, Mains + control cable of 2 meter. SylSmart Standalone enabled.


Product Overview

Product name	Sylbay 4000K L6 47000LM WIDE SSCS
Technology	LED
Housing	Aluminium
Mount	Suspended
General application	Logistics & Industry
ETIM Class	EC001716
Fixture luminous flux (lm)	47400
Luminaire efficacy (lm/W)	145
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Glare control	< 23
Photobiological Risk Group	RG1
Total power consumption (W)	327
Electrical protection	Class I

Sylbay 4000K L6 47000LM WIDE SCS 0040382

Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	Yes
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288403823
Warranty	5 years

Photometry

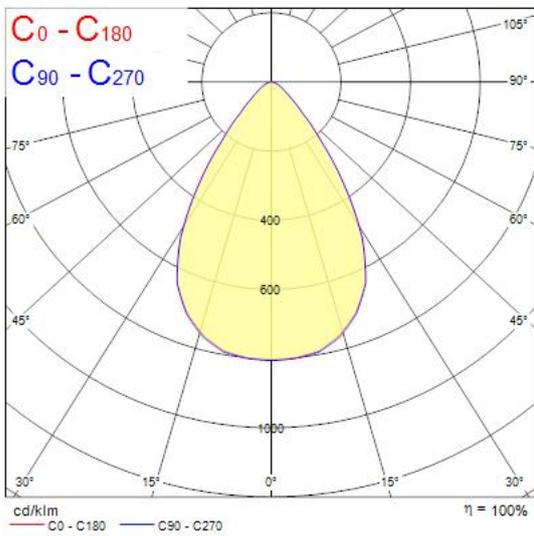

Technical drawings

