

START eco Downlight 215 2100lm 830 Surface

Code article 0054105

SYLVANIA



STARTTM



START eco Downlight is an integrated LED surface mounted downlight with built-in non dimmable driver; 24W; 2100Lm; 88Lm/W; 3000K.

Atouts techniques


Dimensions (mm)

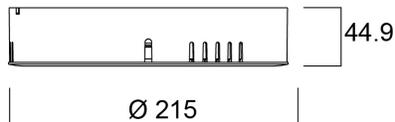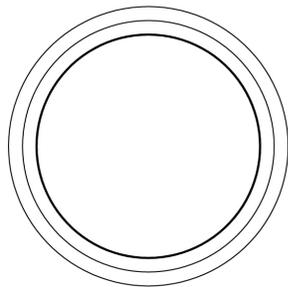

Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	1.56	51"	51"	2081
1.0	3.12	102"	102"	520
1.5	4.67	153"	153"	220
2.0	6.23	204"	204"	150
2.5	7.79	255"	255"	90
3.0	9.35	306"	306"	50

Distance [m] Cone diameter [m]
 — C0 - C180 (Half beam angle: 114.6°) Illuminance [lx]

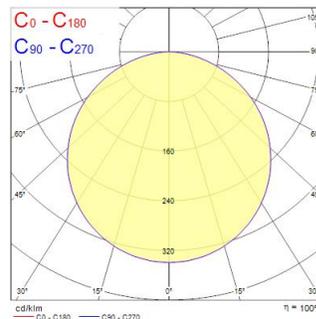

START eco Downlight 215 2100lm 830 Surface

Code article 0054105

SYLVANIA

Données générales

Nom du produit	START eco Downlight 215 2100lm 830 Surface
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Ceiling surface mounting
General application	Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	3 ans

Données optiques

Fixture luminous flux (lm)	2100
Luminaire efficacy (lm/W)	88
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 28
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	24
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.5
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	115.0
Electrical protection	Class II
Control gear required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	173
Courant d'appel (A)	14
Inrush Duration (µs)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Medium (21% - 40%)
Max. products per 10A C Breaker	40
Max. products per 13A C Breaker	53
Max. products per 16A C Breaker	66
Max. products per 20A C Breaker	83
Max. products per 10A B Breaker	23
Max. products per 13A B Breaker	31
Max. products per 16A B Breaker	39
Max. products per 20A B Breaker	49

Durée de vie

Lifespan L70 B50 | 30000

START eco Downlight 215 2100lm 830 Surface

Code article 0054105

SYLVANIA

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	34
Nominal Product Diameter (mm)	215
Poids (kg)	0.42

Emballage

Product EAN number	5410288541051
Longueur simple de l'emballage (cm)	21.8
Largeur simple de l'emballage (cm)	4.8
Packaging single depth (cm)	22.0
DUN14 (inner)	15410288541058
Units per outer package	8
Packaging outer length / height (cm)	45.0
Packaging outer width (cm)	23.0
Packaging outer depth (cm)	22.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40