

Pixo Line 1500 D Asym 840 Black

Code article 0007834

SYLVANIA


PROTM



Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps, traslucent double asymmetric optic diffuser, light beam angle:25° black finishing colour. Light color temperature: 4000K, max. system power: 50W Max. fixture lumen output: 7600lm, efficacy: 152lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx38.4mmx37mm

Atouts techniques

Dimensions (mm)

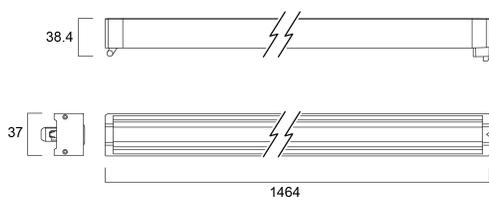

Photométrie

| Distance [m] | Cone diameter [m] | Beam angle [°] | Illuminance [lx] |
|--------------|-------------------|----------------|------------------|
| 0.5 | 0.80 1.45 | 80° 85° | 400 280 |
| 1.0 | 1.59 2.90 | 80° 85° | 100 70 |
| 1.5 | 2.39 4.35 | 80° 85° | 44 31 |
| 2.0 | 3.18 5.80 | 80° 85° | 22 16 |
| 2.5 | 3.96 7.25 | 80° 85° | 11 8 |
| 3.0 | 4.77 8.70 | 80° 85° | 6 4 |

Distance [m] Cone diameter [m] Illuminance [lx]
 — C2 - C180 (Half beam angle: 110.0°)
 — C50 - C270 (Half beam angle: 77.0°)

Pixo Line 1500 D Asym 840 Black

Code article 0007834

SYLVANIA

Données physiques

| | |
|-----------------------------|-------|
| Housing colour | Black |
| IP rating | IP20 |
| IK rating | IK03 |
| Longueur (mm) | 1464 |
| Largeur (mm) | 37 |
| Nominal Product Height (mm) | 38.4 |
| Poids (kg) | 0.9 |

Emballage

| | |
|--------------------------------------|----------------|
| Product EAN number | 5410288078342 |
| Longueur simple de l'emballage (cm) | 147.0 |
| Largeur simple de l'emballage (cm) | 4.3 |
| Packaging single depth (cm) | 4.3 |
| DUN14 (inner) | 15410288078349 |
| Units per outer package | 10 |
| Packaging outer length / height (cm) | 149.0 |
| Packaging outer width (cm) | 24.0 |
| Packaging outer depth (cm) | 11.0 |

Sécurité

| | |
|---|--------|
| Glow Wire Test (°C) | 650 |
| Condition de fonctionnement optimal (° C) | -20-40 |