

ToLEDo T8 V7 5FT 2700LM 830 RL

Code article 0029297

SYLVANIA




Energy efficient and affordable LED T8 solution to replace conventional fluorescent T8 lamps
Omni-directional uniform light distribution thanks to glass tube construction design, same as traditional fluorescent T8 tubes
High lumen package - 2700lm
High lumen efficacy - 106 lm/W
Switching cycles - 200,000X
Average life 40,000 hours
lifespan
Lamp length - 1500mm
Wide beam angle
High power factor
Suitable for general illumination in offices, supermarkets, department stores, train stations, petrol stations, parking lots and maintenance free applications
Suitable for operation with electromagnetic gears / CCG and direct mains operation (220-240V)
3-Year warranty

Atouts techniques

Dimensions (mm)

Photométrie

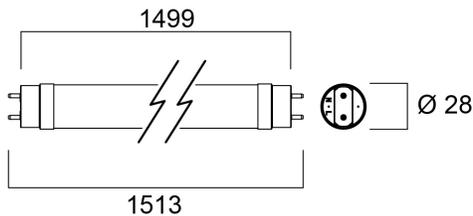

ToLEDo T8 V7 5FT 2700LM 830 RL

Code article 0029297

SYLVANIA

Données générales

Nom du produit	ToLEDo T8 V7 5FT 2700LM 830 RL
Technologie	LED
Puissance (nominale) (W)	25.5
Lamp shape	Tube, double-ended
Cap/Base	G13
Lamp finish	Opal
Fixture rating	Open
General application	Hospitality, Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-20°C...+55°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001959
Numéro virtuel FI	4941315
Warranty	3 ans

Données optiques

Useful luminous flux (Φ_{use})	2700
Flux lumineux utile (nominal) (lm)	2700
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	170
Photobiological Risk Group	RG0
Maintien du flux à la fin de la durée de vie nominale (lm)	70

Caractéristiques électriques

Power consumption (W)	25.5
Wattage (W)	25.5
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.91
Control gear required	No
No. Of switching cycles before premature failures	>200000
Dimmable	No
Courant d'appel (A)	19.4
Inrush Duration (μ s)	614
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	17
Max. products per 16A B Breaker	10

Durée de vie

Lifespan L70 B50	40000
Average life (Nominal) (h)	40000
Durée de vie moyenne (nominale) (h)	40000

Données physiques

IP rating	IP20
Longueur (mm)	1513
Nominal Product Diameter (mm)	28
Poids (kg)	0.26

ToLEDo T8 V7 5FT 2700LM 830 RL

Code article 0029297

SYLVANIA

Emballage

Product EAN number	5410288292977
Longueur simple de l'emballage (cm)	155.5
Largeur simple de l'emballage (cm)	2.9
Packaging single depth (cm)	2.9
DUN14 (inner)	15410288292974
Units per outer package	10
Packaging outer length / height (cm)	161.0
Packaging outer width (cm)	22.0
Packaging outer depth (cm)	10.5

Sécurité

Condition de fonctionnement optimal (° C)	-20-55
Consignes de nettoyage en cas de bris	Not applicable
Lampe à objectif spécial	No
Ne convient pas à l'éclairage résidentiel	Yes
Safety message	Suitable for totally enclosed fixture