


Quantum IP54 600x600 DALI 4500lm 840

Code article 0044644

SYLVANIA


PROTM

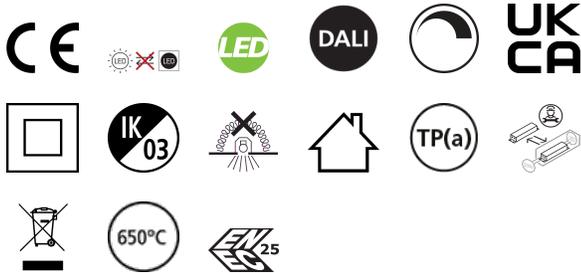

Quantum is a range of recessed integrated LED panels for general indoor lighting applications such as breakout areas, offices and meeting rooms. Max. drive current: 600mA; Max. power: 28W; Lifespan: 120.000Hrs L70:B50; 4000K; CRI 80; Efficacy up to: 161Lm/W; Fixture lumen: 4500lm; Lumen output using EM kit: ~500lm; Glare control <19; IK03; IP54 (from the front); Class II; DALI dimmable. Tp(a) rated diffuser that self-extinguishes within 5 sec when a flame has been removed.


Atouts techniques

Dimensions (mm)

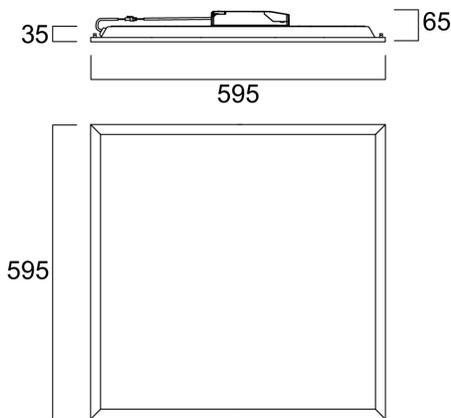

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Illuminance [lx]
0.5	0.88 1.01	41.4° 45.3°	877 1044	1044
1.0	1.76 2.02	41.4° 45.3°	1754 2088	261
1.5	2.64 3.03	41.4° 45.3°	2631 3132	174
2.0	3.52 4.04	41.4° 45.3°	3508 4244	130
2.5	4.41 5.05	41.4° 45.3°	4385 5212	104
3.0	5.29 6.06	41.4° 45.3°	5262 6188	83

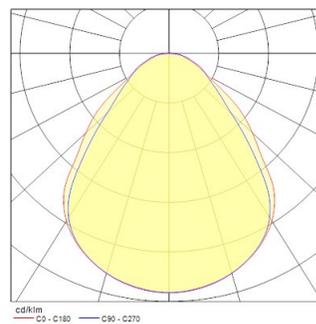

Quantum IP54 600x600 DALI 4500lm 840

Code article 0044644

SYLVANIA

Données générales

Nom du produit	Quantum IP54 600x600 DALI 4500lm 840
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Office, Education
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4279433
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	161
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	28
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15.0
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Drive current (mA)	600
Courant d'appel (A)	5.6
Inrush Duration (µs)	50
Energy Efficiency Class (A->G) of contained light source	A
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	37
Max. products per 16A C Breaker	59
Max. products per 16A B Breaker	59
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	2.5

Durée de vie

Lifespan L70 B50	120000
Lifespan L70 B20	120000
Lifespan L70 B10	120000
Lifespan L80 B50	105000
Lifespan L80 B20	95000
Lifespan L80 B10	85000
Lifespan L90 B50	51000
Lifespan L90 B20	47000
Lifespan L90 B10	44000

Quantum IP54 600x600 DALI 4500lm 840

Code article 0044644

SYLVANIA

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP54/20
IK rating	IK03
Diffuser finish	Diffuse
Diffuser material	PS Polystyrene
Longueur (mm)	595
Largeur (mm)	595
Nominal Product Height (mm)	35
Poids (kg)	2.18

Emballage

Product EAN number	5410288446448
Longueur simple de l'emballage (cm)	66.6
Largeur simple de l'emballage (cm)	3.5
Packaging single depth (cm)	59.8
DUN14 (inner)	15410288446445
Units per outer package	4
Packaging outer length / height (cm)	68.6
Packaging outer width (cm)	16.2
Packaging outer depth (cm)	62.8

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40