

KubiXx 4000K 19KLM WIDE DALI

Code article 0062121

SYLVANIA


PROTM



Logistics and Industry high bay luminaire with wide optics to provide homogenous light distribution for open space areas. 19300lumens, 110W, 175lm/W, 4000K, CRI80, wide beam optic, DALI-2 dimmable, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK06.

Atouts techniques


Dimensions (mm)

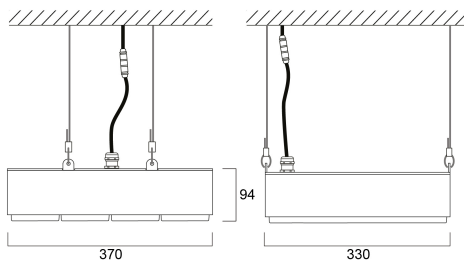

Photométrie

Distance [m]	Cone diameter [m]	E10°	E15°	E30°	E45°	E60°	E75°	E90°	E105°	E120°	Iluminance [lx]
0.5	0.68	18745	15136	9534	6024	4218	3012	2208	1608	1208	18745
1.0	1.36	4681	3784	2383	1506	1054	753	552	402	302	4681
1.5	2.04	3121	2523	1589	1004	703	502	372	272	202	3121
2.0	2.72	2291	1832	1152	723	512	372	272	202	152	2291
2.5	3.41	1753	1402	872	552	392	282	202	152	112	1753
3.0	4.09	1391	1112	692	442	312	222	162	122	92	1391

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 69.2°)
 — C90 - C270 (Half beam angle: 66.6°)



KubiXx 4000K 19KLM WIDE DALI

Code article 0062121

SYLVANIA

Données générales

Nom du produit	KubiXx 4000K 19KLM WIDE DALI
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Suspended
Built in presence detector	NONE
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-40°C...+50°C
ETIM Class	EC001716
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	19300
Luminaire efficacy (lm/W)	175
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	N/A
Glare control	< 23
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	110
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class I
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Drive current (mA)	800
Courant d'appel (A)	65
Inrush Duration (µs)	268
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	5
Max. products per 13A C Breaker	7
Max. products per 16A C Breaker	8
Max. products per 20A C Breaker	10
Max. products per 10A B Breaker	3
Max. products per 13A B Breaker	4
Max. products per 16A B Breaker	5
Max. products per 20A B Breaker	6

Durée de vie

Lifespan L70 B50	120000
Lifespan L80 B20	95000
Lifespan L90 B10	45000

KubiXx 4000K 19KLM WIDE DALI

Code article 0062121

SYLVANIA

Données physiques

Housing colour	Grey
IP rating	IP65
IK rating	IK06
Diffuser material	PC Polycarbonate
Finition réflecteur	Not Applicable
Longueur (mm)	330
Largeur (mm)	370
Nominal Product Height (mm)	94
Poids (kg)	4.9

Emballage

Product EAN number	5410288621210
Longueur simple de l'emballage (cm)	48.0
Largeur simple de l'emballage (cm)	41.0
Packaging single depth (cm)	26.0
DUN14 (inner)	05410288621210
Units per outer package	1
Packaging outer length / height (cm)	48.0
Packaging outer width (cm)	41.0
Packaging outer depth (cm)	26.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-40-50